




Spotlights
4068754013413
L 395, B 166, H 49

Pole mounting, Universal mounting system
anthracite metallic (DB703)

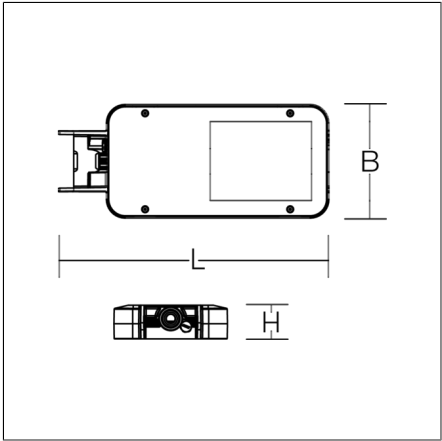

Compact spotlight for efficient outdoor emergency lighting. For escape route illumination. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. Tilt angle can be adjusted and locked in 5 degree steps featuring angular scale. With membrane valve as a standard to avoid condensed water. Cover clear single-pane toughened glass, edge printed. Cover screwed to housing. Lens system made of plastic (PMMA). Replaceable LED spot modules according to ZHAGA standards. Asymmetrical linear light distribution for wide streets and paths.. Constant light output (CLO). With NFC programming interface. Pre-assembled connection cable, length 0.5 m. Suitable for connection to central battery systems. Modular design: Mounting set must be ordered separately.

Product specifications

Typ of emergency lighting	Central battery system
Monitoring	Power circuit
Operating mode	maintained power mode
Length L	395 mm
Width B	166 mm
Height H	49 mm
Weight	3.2 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux, mains operation	4400 lm
System power, mains operation	31 W
Rated luminous flux, emergency operation	1100 lm
System power, emergency operation	8,6 W
System efficiency	142 lm/W
Glare evaluation UGR (4H 8H)	36,3
Beam angle	73°/55°/73°/0°
Rated life	100000 h
Colour rendering index (CRI)	70
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 Hz, 60 Hz
Luminaires on B10A fuse	16
Luminaires on B16A fuse	26
Luminaires on C10A fuse	27
Luminaires on C16A fuse	44
Inrush current / Inrush current duration	18 A / 280 µs
CIE Flux Code / CEN Flux Code	40 79 99 100 100
Type of protection	IP 66
Protection class	I
Filament test	960 °C
Impact resistance	IK06
Ambient temperature for maintained power	-20 °C ... + 40 °C
Ambient temperature for non-maintained power mode	-20 °C ... + 40 °C
Conformity mark	CE

Accessories



61199.009
Fuse box



982974.003



982588.000
Pole bracket for 2 luminaires, uncoated




982589.000
Pole bracket for 3 luminaires, uncoated




982590.000
Pole bracket for 4 luminaires, uncoated



982562.000
Reducing adapter Ø 60 mm



982058.0031
Wall bracket, 500 mm, anthracite metallic



982086.0031
Wall bracket, 1000 mm, anthracite metallic



982049.0031
Pole attachment (double): for spigot 60 mm, anthracite metallic (DB703)



982050.0031
Pole attachment (double): for spigot 76 mm, anthracite metallic (DB703)



982092.000
Pole clip for pole diameter 95 - 114 mm



982977.003



982638.003
Junction box H with strain relief.



982588.0031
Pole bracket for 2 luminaires, powder-coated



982589.0031
Pole bracket for 3 luminaires, powder-coated



982590.0031
Pole bracket for 4 luminaires, powder-coated



982058.000
Wall bracket, 500 mm, uncoated



982086.000
Wall bracket, 1000 mm, uncoated



982049.000
Pole attachment (double): for spigot 60 mm, unpainted



982050.000
Pole attachment (double): for spigot 76 mm, unpainted



982524.0031
Adapter set for 4-fold configuration (4 x 90°)



982093.000
Pole clip for pole diameter 115 - 135 mm

Modules



983164.0031
Mounting bracket



983117.0031
Mounting bracket

LIGHTSTREAM mini

672848.0031 |



982978.0031

Pole attachment for 76 mm spigot.