


EXEO X

672638.002 | Stand-by luminaires for escape route illumination

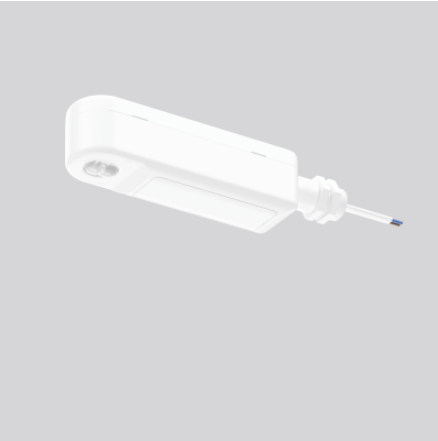

4051859964353  
L 184, B 42, H 45

Surface mounting  
traffic white (RAL 9016)

Luminaire for escape route illumination. Housing made of shockproof plastic (polycarbonate). With plastic lenses for escape route illumination. Fixed to a metric M20 screw connection. Continuous voltage supply necessary. Driver integrated. Self-contained system with automatic self-test.

Product specifications

Type of emergency lighting	Self-contained system
Monitoring	Autotest
Battery	LiFePO4
Duration	3 h
Operating mode	non-maintained power mode
Length L	184 mm
Width B	42 mm
Height H	45 mm
Weight	195 g
Light source	LED
Colour temperature	6100 K
Rated luminous flux, mains operation	undefined lm
System power, mains operation	2 W
Rated luminous flux, emergency operation	170 lm
Beam angle	70°/155°
Rated life	60000 h
Colour rendering index (CRI)	70
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
CIE Flux Code / CEN Flux Code	33 65 95 100 100
Type of protection	IP 65
Protection class	II
Filament test	850 °C
Impact resistance	IK04
Ambient temperature for maintained power	0 °C ... + 45 °C
Ambient temperature for non-maintained power mode	5 °C ... + 45 °C
Conformity mark	CE