


FLAT POLYMERO

672056.002.5.89 | Combined luminaires for escape route illumination



Ceiling and wall luminaires
4051859076681
D 360, H 100

Ceiling mounting, Wall (surface)
white

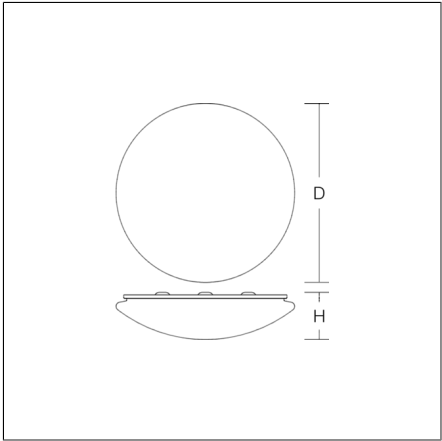

Decorative round surface-mounted luminaire. For escape route illumination. Base: metal, powder-coated. Diffuser made of non-yellowing plastic (PMMA), opal. Diffuser fastening: patented push system. Suitable for Ceiling mounting, Wall (surface). Driver integrated. Suitable for connection to central battery systems. With AC Control monitoring module for LUXIFAIR central battery units.

Product specifications

Type of emergency lighting	Central battery system
Monitoring	Luxifair AC-Control
Battery	without
Operating mode	maintained power mode
Diameter D	360 mm
Height H	100 mm
Weight	1.34 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux, mains operation	1450 lm
System power, mains operation	15 W
Rated luminous flux, emergency operation	1450 lm
System power, emergency operation	15 W
System efficiency	97 lm/W
Glare evaluation UGR (4H 8H)	19,2
Beam angle	down 116° up 180°
Colour rendering index (CRI)	80
Colour tolerance	4
Photobiological safety according to EN 62471	Risk group 0
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 - 60 Hz
Luminaires on B10A fuse	31
Luminaires on B16A fuse	50
Luminaires on C10A fuse	52
Luminaires on C16A fuse	85
Inrush current / Inrush current duration	5 A / 50 µs
CIE Flux Code / CEN Flux Code	43 72 90 88 100
Type of protection	IP 40
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK03
Ambient temperature for maintained power	0 °C ... + 25 °C
Conformity mark	CE, EAC

FLAT POLYMERO

672056.002.5.89 | Combined luminaires for escape route illumination



Accessories



981961.002
Mounting accessories: Wall mounting

Spareparts



08-311161.012
Replacement diffuser