



piconet Uitbreidingsmodule voor IP-Link
1-kanalige SSI-sensor-interface
SNNE-10S-0005

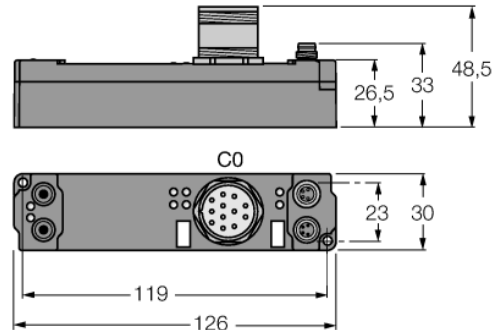


- SSI-sensor-interface
- 1-kanalig
- Parametreerbare functies
- ondersteund via I/O-ASSISTANT 2
- directe IP-Link aansluiting
- glasvezelversterkte behuizing
- vergoten module-elektronica
- metalen connector
- beschermingsgraad IP67

encoder - M23 x 1

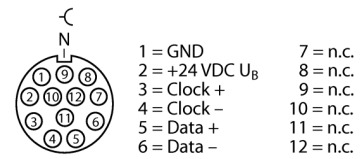

spanningsvoeding M8 x 1



Type	SNNE-10S-0005
Ident no.	6824214
Bedrijfs-/lastspanning	20...29 VDC
Bedrijfsstroom	≤ 55 mA
Lengte lichtgeleider	≤ 15 m
Bitoverdracht	differentieel (RS485)
Transmissiesnelheid	variabel tot 1 MHz (default 250 Hz)
Seriële ingang	24 Bit
Datarichting	lezen
Sensorvoeding	24 VDC uit lastspanning
Potentiaalscheiding	bedrijfsspanning naar RS232
Afmetingen (B x L x D)	30 x 126 x 26.5mm
Vibratietest	Volgens EN 60068-2-6
Schoktest	volgens EN 60068-2-27
Elektromagnetische compatibiliteit	Volgens EN 61000-6-2/EN 61000-6-4
Beschermingsgraad	IP67
Certificaten	CE, cULus

piconet Uitbreidingsmodule voor IP-Link
1-kanalige SSI-sensor-interface
SNNE-10S-0005

data in de procesafbeelding

Pre-conditions	Address	Input data		Output data	
Compact mapping: Starting with D3 in "Low-Byte" word 0 all other bytes follow immediately (highlighted in grey). Complex mapping: Data are mapped with control and status byte	Word	High-Byte	Low-Byte	High-Byte	Low-Byte
	0	D3	SB	Reg1	CB
	1	D1	D2	reserved	Reg0
	2	reserved	D0	reserved	reserved