

Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr cable EM 12VAC/DC GN/YE/RD



Part No.:	698.310.74
t	Kompakt 37

MECHANICAL DATA			
Height	175 mm		
Diameter	38 mm		
Materials	PC		
Dome colour	Clear		
Housing colour	Silver		
Protection category	IP65		
Connection	Cable		
cross-sectional area maximum	0,34mm² / 22AWG		
Cable entry	Membrane grommet		
Cable entry minimum	d = 1 mm		
Cable entry maximum	d = 9 mm		
Cable length	2000 mm		
Tension relief	Pull-out protection		
Type of fixing	Built-in mounting		
Working temperature minimum	-20°C		
Working temperature maximum	+50°C		
Weight with packaging	196 g		
Product weight	162 g		

ELECTRICAL DATA				
Operating voltage	12V			
Operating voltage type	AC/DC			
Operating voltage frequency	50Hz			
Operating voltage tolerance	+/- 10%			
Rated operational voltage	12 VDC			
Rated operational current	275 mA			
Rated inrush current	500 mA			
Protection class	Protection class 2			
Pollution degree	3 In the connection area: 2			

OPTICAL DATA			
Light source	LED		
Light colour	Green Red Yellow		
Optical signal image	Permanent		
Service life optical	50,000 h maximum		

APPROVAL DATA

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr cable EM 12VAC/DC GN/YE/RD


Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12 Type 4X
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr cable EM 12VAC/DC GN/YE/RD

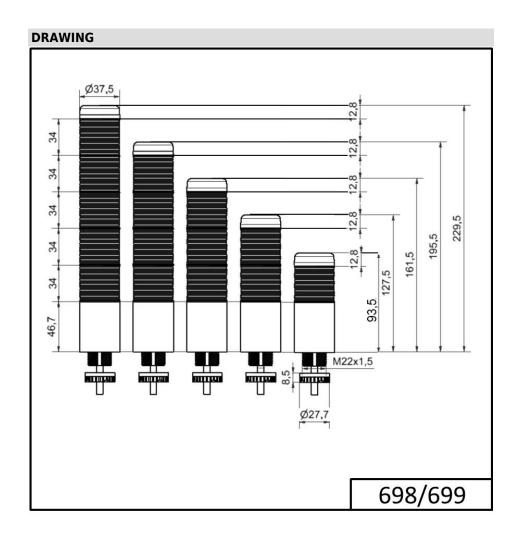

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.