

# OCULUS LED MINI DALI 11400LM 840 IP66 I GLASS 105D SP10KV 72W

DETAILED CARD



## TECHNICAL PARAMETERS

|                                    |                         |
|------------------------------------|-------------------------|
| Index:                             | 967405                  |
| Rated power of the luminaire [W]*: | 72                      |
| Luminous flux [lm]*:               | 11400                   |
| Colour temperature [K]:            | 4000                    |
| Impact resistance:                 | IK08                    |
| Ingress protection:                | IP66                    |
| Electrical protection class:       | I                       |
| Energy efficiency class:           | B                       |
| SDCM:                              | ≤ 3                     |
| Material of the body:              | powder coated aluminium |

## CHARACTERISTICS

OCULUS LED MINI is a HIGH-BAY luminaire from the NEXT GEN product line, constituting a new generation of luminaires dedicated to LED technology. The designed-from-scratch body – made of die-cast aluminium and powder coated – uses natural conduction and convection processes, which have a positive effect on luminaire's heat management. The shape of the body with an integrated, effective heat sink and high-quality materials ensure maximum heat dissipation from the LED module. The driver's external compartment, separated from the body, guarantees optimal thermal working conditions for the power supply system. This enables the luminaire to work in an ambient temperature of max 55°C. LEDs from a reputable manufacturer and new LED modules enable very high luminous efficiency. This guarantees that the required lighting level and significant energy savings are achieved. The diffuser and optical system are composed of precise linear lenses made of polycarbonate (PC). There are 3 dedicated ranges of light distribution available: 55°, 75°, 105°. GLASS version with tempered glass (without lenses) and 105° distribution is also available. Standard equipped with a 0.3 m long H07RN-F cable terminated with an additional male and female connector, which makes the assembly easier and more convenient. Its design is adapted for suspended mounting and surface mounting (ceiling and wall) requiring the use of additional accessories.

## APPLICATION

The luminaire is designed for suspended mounting using chains, ropes, etc. and with the use of additional accessories also surface-mounted (ceiling and wall) both indoors and outdoors. It works perfectly in factories and production halls as well as large-scale warehouses and logistics centers.


# OCULUS LED MINI DALI 11400LM 840 IP66 I GLASS 105D SP10KV 72W

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

|                                   |                         |                                |                                                                             |
|-----------------------------------|-------------------------|--------------------------------|-----------------------------------------------------------------------------|
| Rated power of the luminaire [W]: | 72                      | Impact resistance:             | IK08                                                                        |
| Index:                            | 967405                  | Ingress protection:            | IP66                                                                        |
| Colour temperature [K]:           | 4000                    | Mounting version:              | surface, suspended                                                          |
| Light source:                     | LED                     | Cable length [m]:              | 0.30                                                                        |
| Luminous flux [lm]:               | 11400                   | Dimensions of single box [mm]: | 140/350/350                                                                 |
| Nominal power [W]:                | 72                      | Net weight [kg]:               | 2.430                                                                       |
| Beam angle [°]:                   | 105                     | Warranty [years]:              | 5                                                                           |
| Supply voltage [V]:               | 220 - 240               | AC voltage range [V]:          | 198 – 264                                                                   |
| Frequency [Hz]:                   | 50 - 60                 | DC voltage range [V]:          | 170 – 280                                                                   |
| Diffuser material:                | tempered glass          | LED lifespan L70B50 [h]:       | 107000                                                                      |
| DIMM DALI:                        | yes                     | LED lifespan L80B20 [h]:       | 65000                                                                       |
| Energy efficiency class:          | B                       | LED lifespan L90B10 [h]:       | 32000                                                                       |
| Luminous efficacy [lm/W]:         | 156                     | Working temperature [°C]:      | from -25 to +55                                                             |
| Electrical protection class:      | I                       | Category type:                 | high-bay and low-bay                                                        |
| Colour rendering index:           | >80                     | Photobiological safety:        | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| SDCM:                             | ≤ 3                     | ETIM class:                    | EC001716                                                                    |
| Power factor:                     | 0.95                    | The number of implement units: | 1                                                                           |
| Surge protection [kV]:            | 4                       | Warranty [years]:              | 5                                                                           |
| Diffuser type:                    | transparent             | CE certificate:                | <a href="#">156/2023</a>                                                    |
| Diffuser colour:                  | transparent             | PZH certificate:               | <a href="#">B-BK-60212-0481/21</a>                                          |
| Material of the body:             | powder coated aluminium | Manual:                        | <a href="#">Download PDF</a>                                                |
| Colour of the body:               | grey                    | Plik LDT:                      | <a href="#">Download</a>                                                    |
| Dimensions (H/W/T/S) [mm]:        | 107/320                 |                                |                                                                             |

## LIGHT CURVES

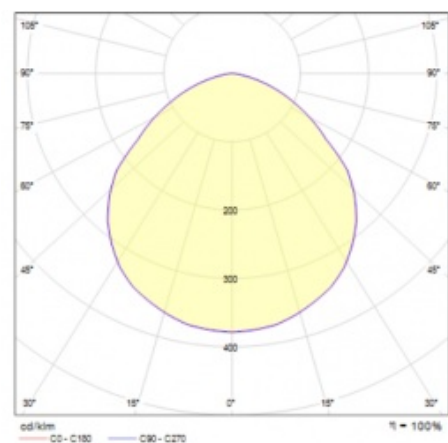


# OCULUS LED MINI DALI 11400LM 840 IP66 I GLASS 105D SP10KV 72W


DETAILED CARD

## ACCESSORIES AVAILABLE


| index   | Name                                                                              |
|---------|-----------------------------------------------------------------------------------|
| 964886  | OCULUS LED - universal handle-lack of compatibility with Dali version 294W        |
| 964893  | OCULUS LED - surface mounting handle-lack of compatibility with Dali version 294W |
| 967030  | OCULUS LED MINI - protective grid                                                 |
| WSEL438 | Remote control for motion sensor HD01R                                            |
| WSEL415 | WSEL415 Remote control for - PIR sensor                                           |
| 967054  | OCULUS LED MINI- RCR sensor -complete                                             |
| 967047  | OCULUS LED MINI- PIR / RCR DALI sensor complete                                   |
| 561399  | OCULUS LED MINI- safety net kit                                                   |




OCULUS LED - universal handle-lack of compatibility with Dali version 294W (964886)




OCULUS LED - surface mounting handle-lack of compatibility with Dali version 294W (964893)



OCULUS LED MINI - protective grid (967030)



Remote control for motion sensor HD01R (WSEL438)




WSEL415 Remote control for - PIR sensor (WSEL415)



OCULUS LED MINI- RCR sensor - complete (967054)



OCULUS LED MINI- PIR / RCR DALI sensor complete (967047)



OCULUS LED MINI- safety net kit (561399)

Card creation date: 08 January 2025  
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 156/2023