

# COMPACT LED EVO P 52W 830 PRM II KL

DETAILED CARD



## TECHNICAL PARAMETERS

|                          |         |
|--------------------------|---------|
| Index:                   | 628559  |
| Ingress protection:      | IP44/20 |
| Impact resistance:       | IK07    |
| Nominal power [W]:       | 52      |
| Luminous flux [lm]*:     | 6100    |
| Colour temperature [K]:  | 3000    |
| Colour rendering index:  | >80     |
| SDCM:                    | ≤ 3     |
| Energy efficiency class: | D       |
| Material of the body:    | ABS     |

## CHARACTERISTICS

Compact LED luminaire designed for recessed installation in modular and plasterboard ceilings. Equipped with energy-saving LED panels and an evenly highlighted opal or prismatic diffuser, providing low glare (UGR<19)\*. Made of plastic. Assembly or electrical connection does not require removing the diffuser.

\* The UGR coefficient is met for the typical use of the luminaire

## APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus. The luminaire is used both in new applications, as well as it can replace traditional fluorescent luminaires with energy-saving LED solutions. The fitting's design is suitable for mounting in 600x600 or 625x625 modular ceilings.


# COMPACT LED EVO P 52W 830 PRM II KL

## DETAILED CARD

### TECHNICAL PARAMETERS TABLE

|                                   |            |                           |                                                                             |
|-----------------------------------|------------|---------------------------|-----------------------------------------------------------------------------|
| Nominal power [W]:                | 52         | Colour of the body:       | white                                                                       |
| Index:                            | 628559     | Impact resistance:        | IK07                                                                        |
| Colour temperature [K]:           | 3000       | Ingress protection:       | IP44/20                                                                     |
| Light source:                     | LED module | Mounting version:         | recessed                                                                    |
| Luminous flux [lm]:               | 6100       | Working temperature [°C]: | from -20 to +35                                                             |
| Diffuser type:                    | PRM        | Net weight [kg]:          | 2.200                                                                       |
| Rated power of the luminaire [W]: | 53         | CE certificate:           | <a href="#">455/2023</a>                                                    |
| Supply voltage [V]:               | 220-240    | PZH certificate:          | <a href="#">B-BK-60212-0070/20 B-BK-60212-0042/20 B-BK-60212-0620/20</a>    |
| Frequency [Hz]:                   | 50 - 60    | EAN:                      | 5905963628559                                                               |
| Electrical protection class:      | II         | Category type:            | louvres                                                                     |
| Luminous efficacy [lm/W]:         | 115        | LED lifespan L70B50 [h]:  | 115000                                                                      |
| Dimensions (H/W/T/S) [mm]:        | 595/595/71 | LED lifespan L80B20 [h]:  | 72000                                                                       |
| Energy efficiency class:          | D          | LED lifespan L90B10 [h]:  | 35000                                                                       |
| Colour rendering index:           | >80        | Warranty [years]:         | 5                                                                           |
| SDCM:                             | ≤ 3        | Power factor:             | 0.95                                                                        |
| Diffuser material:                | PC         | ETIM class:               | EC002892                                                                    |
| Material of the body:             | ABS        | Photobiological safety:   | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
|                                   |            | Warranty [years]:         | 5                                                                           |
|                                   |            | Manual:                   | <a href="#">Download PDF</a>                                                |
|                                   |            | Plik LDT:                 | <a href="#">Download</a>                                                    |

### LIGHT CURVES

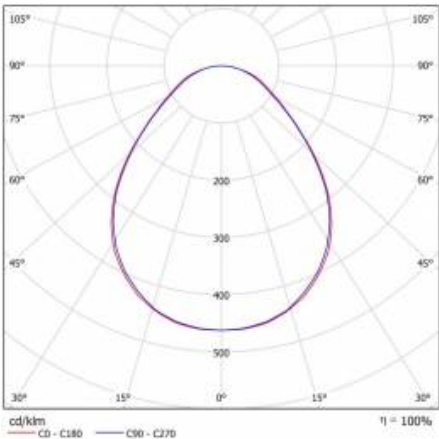


# COMPACT LED EVO P 52W 830 PRM II KL

---

DETAILED CARD

## TECHNICAL DETAILS

---



COMPACT LED EVO PRM

# COMPACT LED EVO P 52W 830 PRM II KL


DETAILED CARD

## ACCESSORIES AVAILABLE


| index  | Name                                                         |
|--------|--------------------------------------------------------------|
| 630033 | Plasterboard mounting brackets (4 pcs)                       |
| 904349 | Safety suspension (modular ceiling)                          |
| 999543 | Plasterboard recessing kit 630x630 white (steel version)     |
| 374845 | Frame adapter KG 635x635 WHITE                               |
| 998966 | Frame steel white structure RAL9016 600x600 SM "well effect" |




Plasterboard mounting brackets (4 pcs) (630033)



Safety suspension (modular ceiling) (904349)



Plasterboard recessing kit 630x630 white (steel version) (999543)



Frame steel white structure RAL9016 600x600 SM "well effect" (998966)

Card creation date:14 March 2025  
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 455/2023