




Pendant luminaires  
4051859280941  
L 1967, B 57, H 75

pendant  
traffic white, matt (RAL 9016)

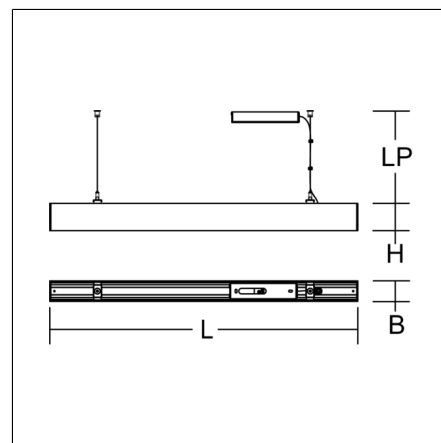

Linear pendant luminaire for aesthetically sophisticated lighting. Housing: extruded aluminium profile, powder-coated. End cap aluminium powder-coated. Canopy made of aluminium, powder-coated. Diffuser made of non-yellowing plastic (PMMA), opal. Direct 65%, indirect 35% light emission. Controlled separately. Suitable for pendant. 2-point steel cable suspension freely positionable and infinitely height-adjustable. Special lengths available on request. LED unit with integrated converter interchangeable and removable. Suitable for through-wiring. With sensors or as a safety luminaire on request.

## Product specifications

Length L	1967 mm
Width B	57 mm
Height H	75 mm
Suspension length LP	2000 mm
Weight	5.2 kg
Light source	LED
Colour temperature	#3000 K   #3000 K
Rated luminous flux	8450 lm
System power	74 W
System efficiency	114 lm/W
Glare evaluation UGR (4H 8H)	23,5
Beam angle	down 104°/107° up 105°/107°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	15
Luminaires on B16A fuse	24
Luminaires on C10A fuse	24
Luminaires on C16A fuse	40
Inrush current / Inrush current duration	26 A / 215 µs
CIE Flux Code / CEN Flux Code	49 80 96 63 100
Type of protection	IP 20
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK03
Ambient temperature	-25 °C ... + 30 °C
Conformity mark	CE, EAC