


CENTRYXX W IP65

672302.002.1.07 | Stand-by luminaires for escape route illumination



Wall luminaires
4051859240976
L 79, B 198, H 198

Wall (surface)
white

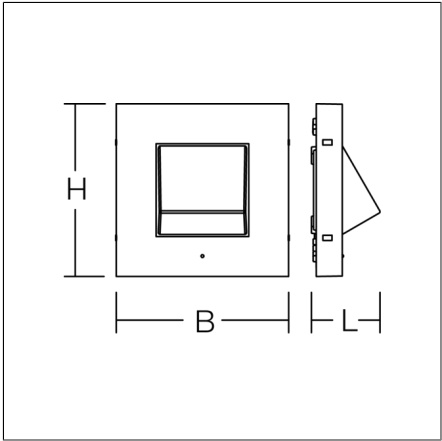

Wall luminaire for escape route illumination. Base: die-cast aluminium, powder-coated Cover: polycarbonate. With plastic lenses for area lighting. Vertical swivel. Electronic ballast included. Self-contained system with automatic self-test and feedback via DALI bus, only to RZB DALI monitoring system. Luminaires with limited surface temperature in accordance with EN 60598-2-24 for use in environments in which a deposit of conductive dust on the luminaire can be expected.

Product specifications

Typ of emergency lighting	Self-contained system
Monitoring	DALI-Sibe
Battery	NiMh
Duration	3 h
Operating mode	maintained power mode
Length L	79 mm
Width B	198 mm
Height H	198 mm
Weight	1.09 kg
Light source	LED
Colour temperature	6500 K
Rated luminous flux, mains operation	400 lm
System power, mains operation	6,5 W
Rated luminous flux, emergency operation	340 lm
System efficiency	62 lm/W
Glare evaluation UGR (4H 8H)	41,4
Beam angle	85°/53°/15°/53°
Colour rendering index (CRI)	70
Driver	Electronic ballast
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 Hz, 60 Hz
Inrush current / Inrush current duration	0.12 A / 5000 µs
CIE Flux Code / CEN Flux Code	40 70 92 98 100
Type of protection	IP 65
Protection class	I
Filament test	850 °C
Impact resistance	IK08
Ambient temperature for maintained power	0 °C ... + 35 °C
Ambient temperature for non-maintained power mode	5 °C ... + 35 °C
Safety marks	D-mark
Conformity mark	CE, UKCA

CENTRYXX W IP65

672302.002.1.07 | Stand-by luminaires for escape route illumination



Accessories



982274.002

Mounting set for through wiring surface installation