


Recessed ceiling and wall luminaires
4051859230694
L 1514, B 38, H 2

Recessed ceiling mounting, wall (recessed)
traffic white, matt (RAL 9016)

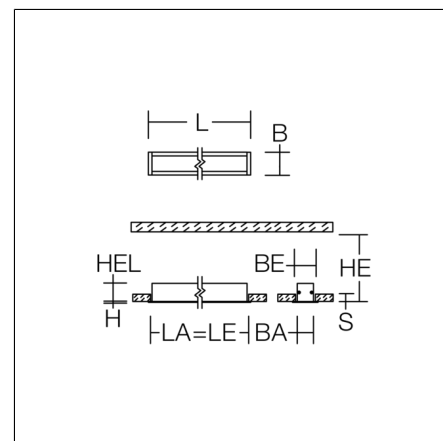

Recessed ceiling and wall luminaire with slim design. Housing: extruded aluminium profile, powder-coated. End cap aluminium powder-coated. High polish aluminium micro grid. Perfect for office areas ($UGR \leq 19$) and environments with computer screens in accordance with EN 12464-1. Suitable for Recessed ceiling mounting, wall (recessed). External driver with connecting cable.

Product specifications

Length L	1514 mm
Width B	38 mm
Height H	2 mm
Cut-out length LA	1506 mm
Cut-out width BA	30 mm
Luminaire: recess height HEL	37 mm
Ceiling thickness S	10-30 mm
Installation space height HE	45-60 mm
Weight	1.17 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	3500 lm
System power	43 W
System efficiency	81 lm/W
Glare evaluation UGR (4H 8H)	19
Beam angle	65°/45°
Rated life	60000 h (L80/B10)
Colour rendering index (CRI)	82
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	11
Luminaires on B16A fuse	18
Luminaires on C10A fuse	19
Luminaires on C16A fuse	31
Inrush current / Inrush current duration	24 A / 275 μ s
CIE Flux Code / CEN Flux Code	90 99 100 100 100
Type of protection	IP 20 ceiling mounting IP 20 wall mounting
Protection class	II
Filament test	650 °C
Impact resistance	IK00
Ambient temperature	-25 °C ... + 25 °C
Safety marks	Do not cover the recessed luminaire!
Conformity mark	CE, EAC