



MASTER Value Decorative LED bulbs

MAS VLE LEDBulbD4-25WE27 G93GOLD SP G

The new collection of MASTER Value Decorative LED bulbs will transform any home. decorative LED bulbs are ideal for decorative lighting projects, they offer a perfect blend of (warm) white light and a minimalistic lighting experience. With a very long lifetime, up to 90% energy savings, no flickering and an instant full level brightness, you can enjoy soft and evenly distributed light. And thanks to the dimmable LED bulbs, you can dial it up or down to suit your mood. So, you can create a welcoming harmony in your space with decorative LED lamps that shine with trendy and stylish charm.

Product data

| General Information | |
|--|--------------------|
| Cap-Base | E27 |
| Nominal lifetime | 15,000 hour(s) |
| Switching Cycle | 20,000 |
| Lighting Technology | LED |
| Light Technical | |
| Color Code | 818 [CCT of 1800K] |
| Luminous Flux | 250 lm |
| Color Designation | 1800 |
| Correlated Color Temperature (Nom) | 1800 K |
| Luminous Efficacy (rated) (Nom) | 62 lm/W |
| Color Consistency | <6 |
| Color rendering index (CRI) | 80 |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % |
| Photobiological safety according to EN 62471 | RG1 |

| Operating and Electrical | |
|---------------------------|----------------------------|
| Line Frequency | 50 to 60 Hz |
| Input Frequency | 50 to 60 Hz |
| Power Consumption | 4 W |
| Lamp Current (Nom) | 24 mA |
| Wattage Equivalent | 25 W |
| Starting Time (Nom) | 0.5 s |
| Warm-up time to 60% light | 0.5 s |
| Power Factor (Fraction) | 0.7 |
| Voltage (Nom) | 220-240 V |
| Temperature | |
| T-Case Maximum (Nom) | 38 °C |
| Controls and Dimming | |
| Dimmable | Only with specific dimmers |

MASTER Value Decorative LED bulbs

Mechanical and Housing

| | |
|--------------------|----------|
| Bulb Finish | Amber |
| Bulb Material | Glass |
| Bulb Shape | G93 |
| Net Weight (Piece) | 0.070 kg |

Approval and Application

| | |
|---|---------------|
| Energy Consumption kWh/1000 h | 4 kWh |
| CE mark | Yes |
| EU RoHS compliant | Yes |
| EyeComfort | Yes |
| Flickering value (PstLM) - Flickering value as per EN 61000-3-3 | 1 |
| Stroboscopic effect visibility measure (SVM) | 0.4 |
| Ambient temperature range | -20 to +45 °C |


Application Conditions

| | |
|-------------------------------------|----|
| can it be used in closed luminaires | No |
|-------------------------------------|----|

Product Data


| | |
|---------------------------------|--|
| Order product name | MAS VLE LEDBulbD4-25WE27 G93GOLD SP G |
| Full product name | MAS VLE LEDBulbD4-25WE27 G93GOLD SP G |
| Full product code | 871951438548100 |
| Order code | 929002983002 |
| Material Nr. (12NC) | 929002983002 |
| Numerator - Quantity Per Pack | 1 |
| EAN/UPC - Product/Case | 8719514385481 |
| Numerator - Packs per outer box | 6 |
| EAN/UPC - Case | 8719514385498 |

Dimensional drawing




| Product | D | C |
|---------------------------------------|-------|--------|
| MAS VLE LEDBulbD4-25WE27 G93GOLD SP G | 96 mm | 143 mm |

Photometric data



Light Distribution Diagram - MAS VLE LEDBulbD4-25WE27 G93GOLD SP G

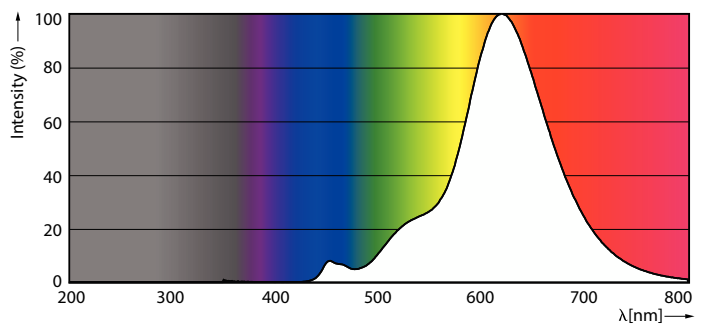

Spectral Power Distribution Colour - MAS VLE LEDBulbD4-25WE27 G93GOLD SP G

MASTER Value Decorative LED bulbs

Lifetime



Life Expectancy Diagram

Lumen Maintenance Diagram - MAS VLE LEDBulbD4-25WE27 G93GOLD SP G

