



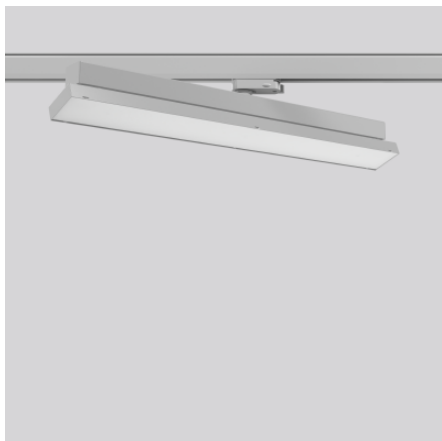

Surface mounted projectors  
4051859756958  
L 569, B 57, H 77

Track on ceiling  
silver, matt (approx. RAL 9006)

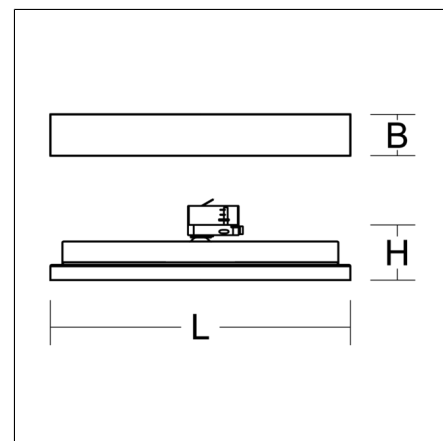

Multifunctional surface-mounted spotlight for area lighting. Very flat design. Housing: sheet steel, powder-coated. Rotation range: 356°. Swivel range: 90°. Consistent alignment possible with visible tilt scale. High-efficiency LED units with flush-mounted opal diffuser made of non-yellowing PMMA. Symmetrical wide beam light distribution. Best colour rendering with CRI ≥90 for fresh products and coloured textiles. With multi adaptor for 3-circuit tracks 230 V. Suitable for Track on ceiling. MultiLumen: Luminous flux adjustable in 3 steps. Factory setting is the highest luminous flux. Environmentally friendly and resource-saving due to replaceable and recyclable components.

### Product specifications

|                                              |                            |
|----------------------------------------------|----------------------------|
| Length L                                     | 569 mm                     |
| Width B                                      | 57 mm                      |
| Height H                                     | 77 mm                      |
| Weight                                       | 1.38 kg                    |
| Light source                                 | LED                        |
| Colour temperature                           | 2700 K                     |
| Rated luminous flux                          | 1700 lm   2200 lm   2950lm |
| System power                                 | 18 W   24 W   33W          |
| System efficiency                            | 89 lm/W   92 lm/W   94lm/W |
| Glare evaluation UGR (4H 8H)                 | 26,7   27,6   28,7         |
| Beam angle                                   | 112°                       |
| Rated life                                   | 50000 h (L80/B10)          |
| Colour rendering index (CRI)                 | 90                         |
| Colour tolerance                             | 3                          |
| Photobiological safety according to EN 62471 | Risk group 1               |
| Driver                                       | Converter                  |
| Control                                      | on/off                     |
| Voltage                                      | 220 - 240 V / 50 Hz, 60 Hz |
| Luminaires on B10A fuse                      | 15                         |
| Luminaires on B16A fuse                      | 24                         |
| Luminaires on C10A fuse                      | 24                         |
| Luminaires on C16A fuse                      | 40                         |
| Inrush current / Inrush current duration     | 26 A / 270 µs              |
| CIE Flux Code / CEN Flux Code                | 47 79 96 100 100           |
| Type of protection                           | IP 20                      |
| Protection class                             | I                          |
| Filament test                                | 650 °C                     |
| Impact resistance                            | IK03                       |
| Ambient temperature                          | 5 °C ... + 25 °C           |
| Conformity mark                              | CE                         |

# TX-MOVE

742160.004.2 | Surface mounted projector



## Accessories



70319.009

Point outlet for 3-circuit multi adaptor