



DEECOS S mini track-in

742248.004 | Surface mounted projector

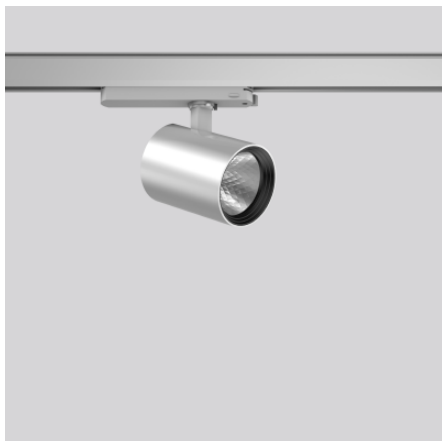

Surface mounted projectors
4051859811114
D 87, H 135

Track on ceiling, Wall track
silver

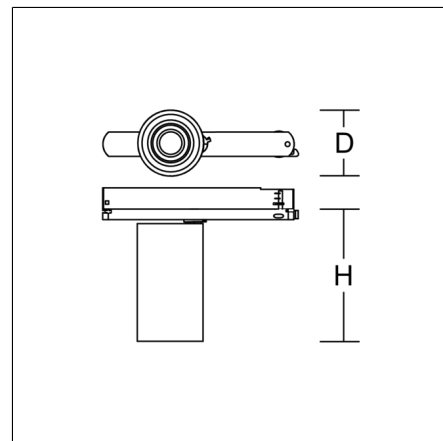

LED surface-mounted projector in modern design with no visible cooling ribs. Housing: die-cast aluminium, powder-coated. Rotation range: 356°. Swivel range: 90°. Black plastic ring and recessed LED to prevent glare from the side. Optical assembly with reflector made of MIRO-Silver with 98% total light reflection for outstanding efficiency - can be changed without tools. Best colour rendering index Ra>90. Superspot version with small spot LED. With multi adaptor for 3-circuit tracks 230 V. Suitable for Track on ceiling, Wall track. Track-in driver integrated into the adaptor. High quality converter without flickering and stroboscopic effect. The following accessories can be mounted without use of tools: interchangeable lenses, decorative glasses, honeycomb louvre, clear and frosted diffusers, white interchangeable plastic ring.

Product specifications


Diameter D	87 mm
Height H	135 mm
Weight	0.62 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	2200 lm
System power	22 W
System efficiency	100 lm/W
Glare evaluation UGR (4H 8H)	13,5
Beam angle	13°
Rated life	50000 h (L90/B10)
Colour rendering index (CRI)	92
Colour tolerance	2
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	33
Luminaires on B16A fuse	53
Luminaires on C10A fuse	53
Luminaires on C16A fuse	84
Inrush current / Inrush current duration	9.5 A / 16 µs
CIE Flux Code / CEN Flux Code	100 100 100 100 100
Type of protection	IP 20
Protection class	II
Filament test	650°C - 30 seconds
Impact resistance	IK06
Ambient temperature	25 °C
Conformity mark	CE, EAC

DEECOS S mini track-in


742248.004 | Surface mounted projector



Accessories




982370.000
Diffuser, transparent




982371.003
Anti-glare honeycomb louvre




982421.002
White plastic ring for lens.



982369.043
Oval corridor lens



982370.010
Diffuser, satinated



982369.003
Spot lens



982368.003
Reflector spot



982419.002
White plastic ring for reflector.