

# Axyl Trim

THORN

## 96701451 AXYL TRIM S VISO 1L930 A/S RD ANT

LED 3W AXYL_TR_S_VS-AS930	IP65	IK06		CE	
---------------------------	------	------	---	----	--


### Axyl Trim

AXYL Trim, a wall recessed, architectural LED luminaire for decorative facade lighting, with asymmetrical distribution. Class III electrical.. DALI-2 dimmable Remote LED driver. , IP65, Impact strength: IK06. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: -20°C to +50°C. Complete with 3000K LED..


Dimensions: 106 x 106 x 98 mm  
 Luminaire input power: 3.4 W  
 Luminaire luminous flux: 49 lm  
 Luminaire efficacy: 14 lm/W  
 Weight: 0.6 kg



TLG\_AXYL\_F\_TRIM\_S\_VISO\_ANT.jpg

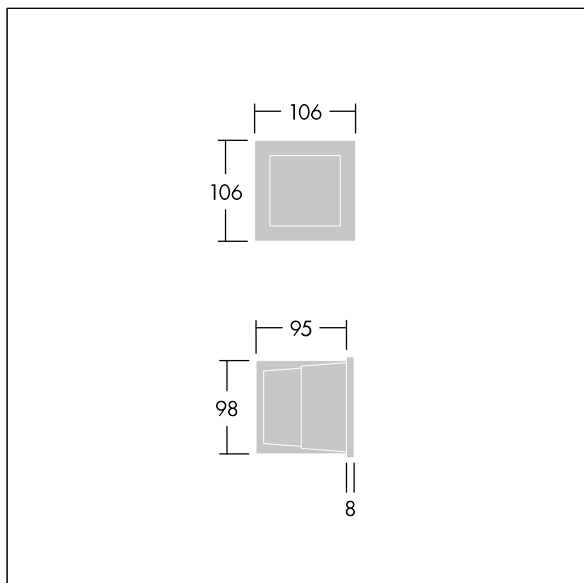

TLG\_AXYL\_M\_TRIM\_S.wmf

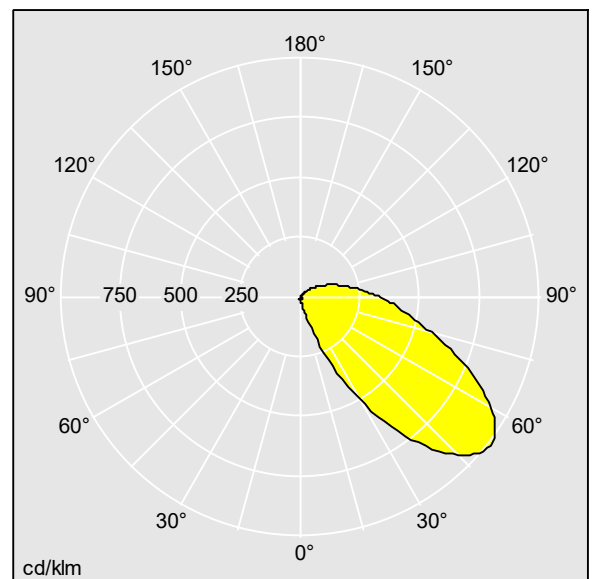

96701451.ltd

Lamp position: STD - standard  
 Light Source: LED  
 Luminaire luminous flux\*: 49 lm  
 Luminaire efficacy\*: 14 lm/W  
 Colour Rendering Index min.: 90  
 Correlated colour temperature\*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3  
 Rated useful life (B10)\*:  
 L80 70000 h at 25 °C  
 Ballast: 0x LED\_DRV  
 Luminaire input power\*: 3.4 W Power factor = 0.4  
 Dimming: Dali2Dim  
 LOR: 1,00 ULOR: 0,16 DLOR: 0,84

This product contains a light source of energy efficiency class E.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
 © Thorn Lighting