


FLAT SLIM disc

312638.002 | Ceiling and wall luminaires



Ceiling and wall luminaires
4051859773870
D 380, H 75

Ceiling mounting, Wall (surface)
traffic white, matt (RAL 9016)

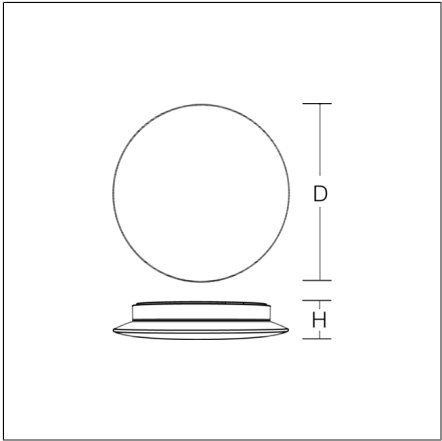

Decorative round LED surface-mounted luminaire for indoor and outdoor use. Base: pressure die-cast aluminium, powder-coated. Standard Gore™ Protective Vents diaphragm valve to avoid condensation. Mouth blown 3-layer opal glass (Triplex glass) with satin finish. Glass fastening: bayonet fixing. Uniform lighting achieved by the use of LED panel boards. Suitable for Ceiling mounting, Wall (surface). Very easy installation thanks to plug & play connection. The large connection compartment on the back for convenient connections is also ideal for through wiring. MultiLumen: 2 steps adjustable luminous flux. Factory setting is the highest luminous flux. MultiColour: Colour temperature individually adjustable either 3000 K or 4000 K via switching element. Factory setting is 3000 K.

Product specifications


Diameter D	380 mm
Height H	75 mm
Weight	2.71 kg
Light source	LED
Colour temperature	3000 K 4000 K
Rated luminous flux	3000 K: 1150 lm 2450 lm
	4000 K: 1150 lm 2500 lm
System power	3000 K: 11 W 24 W
	4000 K: 11 W 24 W
System efficiency	3000 K: 105 lm/W 102 lm/W
	4000 K: 105 lm/W 104 lm/W
Glare evaluation UGR (4H 8H)	3000 K: 18,4 21,1
	4000 K: 18,4 21,1
Beam angle	down 116° up 130°
Rated life	50000 h (L90/B50)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	31
Luminaires on B16A fuse	50
Luminaires on C10A fuse	52
Luminaires on C16A fuse	85
Inrush current / Inrush current duration	5 A / 50 µs
CIE Flux Code / CEN Flux Code	44 75 93 79 100
Type of protection	IP 65
Protection class	I
Filament test	960 °C
Impact resistance	IK02
Ambient temperature	-25 °C ... + 35 °C
Safety marks	D-mark
Conformity mark	CE, EAC

FLAT SLIM disc

312638.002 | Ceiling and wall luminaires



Spareparts



982971.002
Replacement LED module



982902.002
Replacement glass