


# FLAT SLIM round

312132.0031.1.76 | Ceiling and wall luminaires



Ceiling and wall luminaires  
4051859175827  
D 230, H 63

Ceiling mounting, Wall (surface)  
anthracite metallic (DB703)

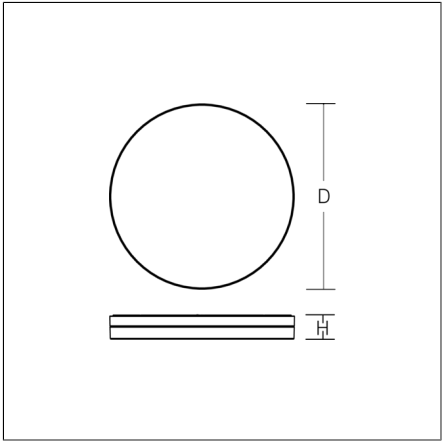

Decorative round LED surface-mounted luminaire for indoor and outdoor use. Base: pressure die-cast aluminium, powder-coated. Standard Gore™ Protective Vents diaphragm valve to avoid condensation. Mouth blown 3-layer opal glass (Triplex glass) with satin finish. Glass fastening: bayonet fixing. Uniform lighting achieved by the use of LED panel boards. Suitable for Ceiling mounting, Wall (surface). Very easy installation thanks to plug & play connection. The large connection compartment on the back for convenient connections is also ideal for through wiring. TouchDim sensor capable. Light and/or presence sensors can be integrated.

### Product specifications


Diameter D	230 mm
Height H	63 mm
Weight	1.36 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	1000 lm
System power	13 W
System efficiency	77 lm/W
Glare evaluation UGR (4H 8H)	20,9
Beam angle	down 124° up 180°
Rated life	50000 h (L70/B10)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 230 V / 50 - 60 Hz
Luminaires on B10A fuse	114
Luminaires on B16A fuse	182
Luminaires on C10A fuse	114
Luminaires on C16A fuse	182
Inrush current / Inrush current duration	0.15 A / 10000 µs
CIE Flux Code / CEN Flux Code	42 72 92 89 100
Type of protection	IP 65
Protection class	I
Filament test	960°C - 30 seconds
Impact resistance	IK03
Ambient temperature	-20 °C ... + 30 °C
Conformity mark	CE, EAC

# FLAT SLIM round

312132.0031.1.76 | Ceiling and wall luminaires



## Spareparts



E90-6843.020.1  
Replacement LED module



983181.002  
Replacement glass