



LAVANO UNO

451198.000 | Ceiling and wall luminaires

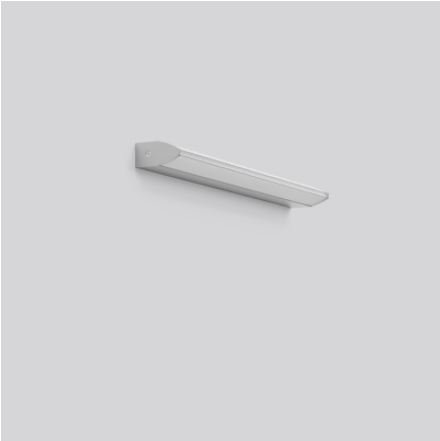

Ceiling and wall luminaires
4051859173557
L 580, B 40, H 83

Ceiling mounting, Wall (surface)
white aluminium (RAL 9006)

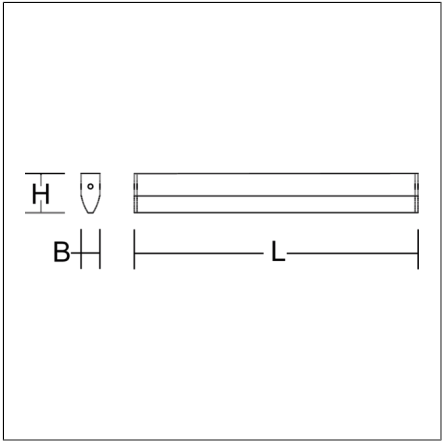

Linear LED surface-mounted luminaire in an elegant design. Extruded aluminium profile base, lacquered. End caps aluminium, painted. Diffuser: plastic, opal, allows for brilliant glittering light along the lines of the ellipse. Suitable for Ceiling mounting, Wall (surface).

Product specifications

Length L	580 mm
Width B	40 mm
Height H	83 mm
Weight	1.45 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	1250 lm
System power	11 W
System efficiency	114 lm/W
Glare evaluation UGR (4H 8H)	24,6
Beam angle	down 154°/113° up 180°/180°
Rated life	50000 h (L90/B10)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	20
Luminaires on B16A fuse	31
Luminaires on C10A fuse	32
Luminaires on C16A fuse	52
Inrush current / Inrush current duration	18 A / 190 µs
CIE Flux Code / CEN Flux Code	36 62 83 77 100
Type of protection	IP 40 ceiling mounting IP 40 wall mounting
Protection class	I
Filament test	650 °C
Impact resistance	IK02
Ambient temperature	-20 °C ... + 50 °C
Conformity mark	CE, EAC