




Recessed ceiling luminaires  
4051859688242  
L 424, B 55, H 190

Recessed ceiling mounting  
black

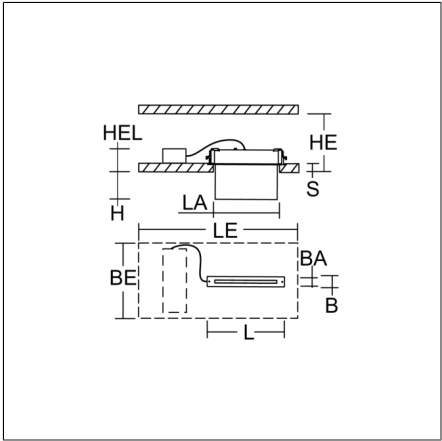

Luminaire for escape route identification. Installation housing sheet steel. Ceiling plate stainless steel high polish or powder-coated. Display panel: highly transparent panel, plastic, with legend on one side/both sides. Electronic ballast included. Self-contained system with automatic self-test. Please indicate legend number when placing your order!

Product specifications

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Type of emergency lighting                        | Self-contained system    |
| Monitoring                                        | Autotest                 |
| Battery                                           | NiMh                     |
| Duration                                          | 8 h                      |
| Operating mode                                    | maintained power mode    |
| Viewing Distance                                  | 30 m                     |
| Length L                                          | 424 mm                   |
| Width B                                           | 55 mm                    |
| Height H                                          | 190 mm                   |
| Cut-out length LA                                 | 410 mm                   |
| Cut-out width BA                                  | 42 mm                    |
| Installation space height HE                      | 90 mm                    |
| Ceiling thickness S                               | 1-30 mm                  |
| Weight                                            | 2.35 kg                  |
| Light source                                      | LED                      |
| Colour temperature                                | 4000 K                   |
| System power, mains operation                     | 5,8 W                    |
| Colour rendering index (CRI)                      | 80                       |
| Photobiological safety according to EN 62471      | Risk group 1             |
| Driver                                            | Transformer              |
| Control                                           | on/off                   |
| Voltage                                           | 220 - 240 V / 50 - 60 Hz |
| Type of protection                                | IP 40                    |
| Protection class                                  | I                        |
| Filament test                                     | 650°C - 30 seconds       |
| Impact resistance                                 | IK03                     |
| Ambient temperature for maintained power          | 0 °C ... + 25 °C         |
| Ambient temperature for non-maintained power mode | 5 °C ... + 40 °C         |
| Conformity mark                                   | CE                       |

Accessories



981687.000  
Concrete box