


TX-MOVE

742161.004.1 | Surface mounted projector



Surface mounted projectors
4051859755333
L 569, B 119, H 75

Track on ceiling
silver, matt (approx. RAL 9006)

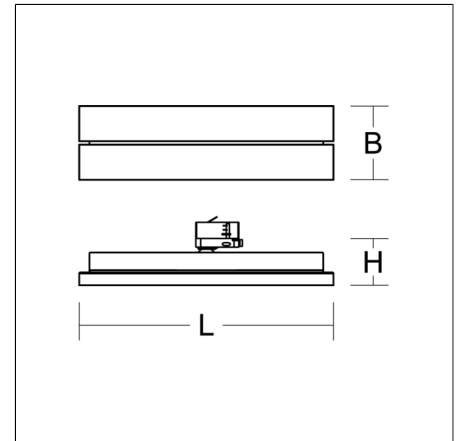

Multifunctional surface-mounted spotlight for area lighting. Very flat design. Housing: sheet steel, powder-coated. Rotation range: 356°. Swivel range: 90°. Consistent alignment possible with visible tilt scale. High-efficiency LED units with optimum light control thanks to clear plastic (PC) lens optics. Spezielle Mikrostrukturen reduzieren Gelbsaum. Symmetrical light distribution. With multi adaptor for 3-circuit tracks 230 V. Suitable for Track on ceiling. MultiLumen: Luminous flux adjustable in 3 steps. Factory setting is the highest luminous flux. Environmentally friendly and resource-saving due to replaceable and recyclable components. Very good glare control, ideal for till areas.

Product specifications

Length L	569 mm
Width B	119 mm
Height H	75 mm
Weight	2.05 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	6250 lm 8450 lm 10400lm
System power	41 W 57 W 73W
System efficiency	142 lm/W 148 lm/W 152lm/W
Glare evaluation UGR (4H 8H)	17,1 18,2 18,9
Beam angle	30°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	8
Luminaires on B16A fuse	13
Luminaires on C10A fuse	13
Luminaires on C16A fuse	21
Inrush current / Inrush current duration	53 A / 220 µs
CIE Flux Code / CEN Flux Code	90 97 99 100 100
Type of protection	IP 20
Protection class	I
Filament test	850 °C
Impact resistance	IK04
Ambient temperature	5 °C ... + 25 °C
Conformity mark	CE

TX-MOVE

742161.004.1 | Surface mounted projector



Accessories



70319.009

Point outlet for 3-circuit multi adaptor