


Vantage UGR<19 Downlight



- UGR<19 performance downlight suitable for commercial and education applications
- Deep cut-off angle for glare control and comfort
- UGR<19 (unified glare rating) compliant luminaire assisting to eliminate glare for visual comfort
- Downlight design allows installation into existing hole cut-outs from 68mm to 100mm
- Powered by Tridonic

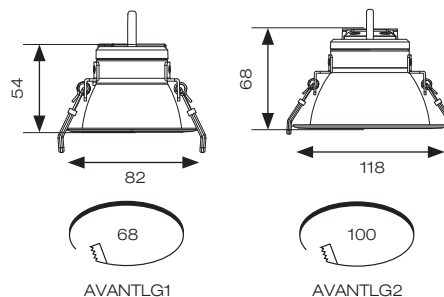

OCTO
Option Available

Powered by
CASAMBI



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
230V	50Hz	-20°C - 25°C	L70 50,000	Ra 90	6	40°	2	20

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	UGR	TRADE
AVANTLG1/CW	Cool White	9W	4000K	800lm	89lm	19	£41.00
AVANTLG1/WW	Warm White	9W	3000K	750lm	83lm	19	£41.00
AVANTLG2/CW	Cool White	14W	4000K	1500lm	107lm	16	£57.00
AVANTLG2/WW	Warm White	14W	3000K	1400lm	100lm	16	£57.00

* UGR Value based on (4H - 8H)

CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (OPTIONS)	DESCRIPTION	TRADE
/M3	Emergency	+ £145.00	/OCTO	OCTO Smart Control	+ £155.00
/SM3	Self-Test Emergency	+ £176.00	/DD	Digital Dimming (DD1/DD3/DD4)	+ £95.00
/DM3	DALI Emergency	+ £260.00			