



Module with 24 diodes common  
catode

<b>Series</b>	CDM
<b>Code</b>	XCDM24CC
<b>Type</b>	CDM24CC
<b>HS code</b>	8541100000
<b>GENERAL TECHNICAL DATA</b>	
<b>Number of poles</b>	24
<b>Version</b>	common cathode
<b>Input rated voltage</b>	0...220 V ±10%
<b>Input rated current</b>	1 A channel / 15 A on common
<b>Operating temperature range</b>	-20...+60°C
<b>Overvoltage category / pollution degree</b>	II / 2
<b>Protection degree</b>	IP 00
<b>Connection terminal</b>	2.5 mm <sup>2</sup> screw
<b>Dimensions (LxHxD)</b>	137x65x93 mm
<b>Housing material</b>	UL94V-0 plastic material
<b>Mounting information</b>	vertical on rails, side by side
<b>ACCESSORIES</b>	
<b>Mounting rail (IEC60715/TH35-7.5)</b>	PR003, PR903, PR005, PR950
<b>Mounting rail (IEC60715/TH35-15)</b>	PR007, PR907, PR006, PR951
<b>APPROVALS AND MARKINGS</b>	CE

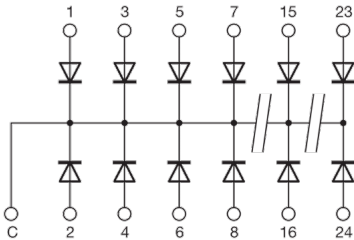

1 The module is equipped with 1N4007 diodes

## DESCRIZIONE DEL PRODOTTO

CDM24CC Module  
with 24 diodes common cathode