

CORAL LED EVO 260MM P 690LM IP44 RCR 830 (9W)

DETAILED CARD



TECHNICAL PARAMETERS

Index:	223914
Ingress protection:	IP44
Nominal power [W]:	9
Luminous flux [lm]*:	690
Colour temperature [K]:	3000
SDCM:	≤ 3
Energy efficiency class:	G
Material of the body:	PP
Ring material:	PP
Diffuser material:	PC

CHARACTERISTICS

Ceiling lights for ceiling or wall mounting. Luminaire design allows surface and concealed installation. The unique design allows replacement of the LED GO! (light source) module without having to replace the entire luminaire. Integrated design for easy installation. Surface-mounted luminaire allows cable termination.


APPLICATION

Suspended mounting board allows quick installation. Removable mounting board available on request as a service kit. Surface wiring. Holes for connection with surface installation, through-wiring possible.

DETAILED CARD

Nominal power [W]:	9
Light source:	LED module
Colour temperature [K]:	3000
Luminous flux [lm]:	690
Rated power of the luminaire [W]:	10.90
Supply voltage [V]:	220-240
Diffuser type:	OPAL
Frequency [Hz]:	50 - 60
Motion sensor:	yes
Luminous efficacy [lm/W]:	71
Energy efficiency class:	G
Electrical protection class:	I
Colour rendering index:	>80
SDCM:	≤ 3
Power factor:	0.61
Max load (RCR) [W]:	400
Exchangeable source:	yes
Diffuser material:	PC
Optics material:	PMMA
Material of the body:	PP
Colour of the body:	white
Ring material:	PP
Ring colour:	white


Dimensions (H/W/T/S) [mm]:	ø260/108
Mounting dimensions [mm]:	ø220
Impact resistance:	IK10
Ingress protection:	IP44
Mounting version:	recessed
Working temperature [°C]:	from -20 to +35
Net weight [kg]:	0.730
Gross weight [kg]:	0.950
Warranty [years]:	5
Index:	223914
EAN:	5905963223914
Category type:	bulkheads
Dusk sensor:	yes
Product line:	CORAL LED EVO
AC voltage range [V]:	220 - 240
LED lifespan L70B50 [h]:	86000
LED lifespan L80B20 [h]:	54000
LED lifespan L90B10 [h]:	26000
CE certificate:	73/2018
ETIM class:	EC002892
Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Manual:	Download PDF
Plik LDT:	Download

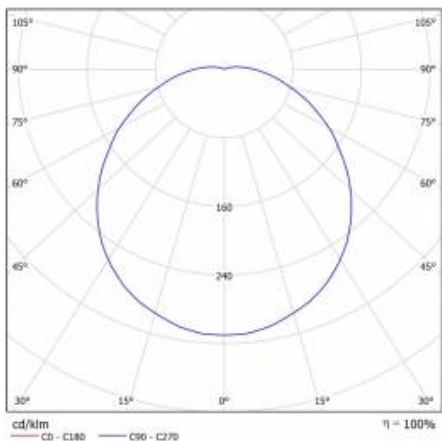

CORAL LED EVO 260MM P 690LM IP44 RCR 830 (9W)

DETAILED CARD

TECHNICAL DETAILS



CORAL LED natynkowe prowadzenie przewodów

CORAL LED EVO 260MM P 690LM IP44 RCR 830 (9W)

DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
223969	CORAL LED EVO 830 - SERVICE KIT
223983	CORAL LED EVO 830 RCR - SERVICE KIT
223976	CORAL LED EVO 840 - SERVICE KIT
223990	CORAL LED EVO 840 RCR - SERVICE KIT

Card creation date:14 March 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric andelectronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 73/2018



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl