


Wall luminaires  
4051859749639  
L 100, B 154, H 131

Wall (surface)  
anthracite metallic (DB703)

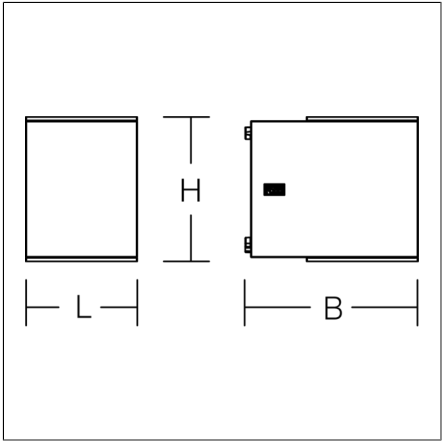

Wallscaping: elegant and innovative wall luminaire for accent lighting. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. With membrane valve as a standard to avoid condensed water. Cover made of ceramic-coated toughened glass with bayonet lock. Light emission downwards, superspot. Fixing on the wall outside the sealed volume, drill hole deviations can be compensated. Screwless luminaire fixing via RZB Gravalock® System.

Product specifications

Length L	100 mm
Width B	154 mm
Height H	131 mm
Weight	1.55 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	130 lm
System power	3.5 W
System efficiency	37 lm/W
Glare evaluation UGR (4H 8H)	13,4
Beam angle	19°/2°/15°/2°
Rated life	50000 h (L70)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 2
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B16A fuse	17
Luminaires on C16A fuse	30
Inrush current / Inrush current duration	25 A / 400 µs
CIE Flux Code / CEN Flux Code	91 97 99 100 100
Type of protection	IP 65
Protection class	I
Filament test	960°C - 30 seconds
Impact resistance	IK07
Ambient temperature	-20 °C ... + 40 °C
Conformity mark	CE

Accessories



982768.003  
Safety glass. Blanking cover.



982768.013  
Safety glass. Centre: transparent d64 mm.

# NADELSPOT

582087.0031 | Wall luminaires



982768.023

Safety glass. Centre: satin finish d64 mm.



982768.033

Safety glass. Centre: transparent with pressed glass lens Superspot.