




Ceiling luminaires
4051859687887
L 233, B 40, H 184

Ceiling mounting
black

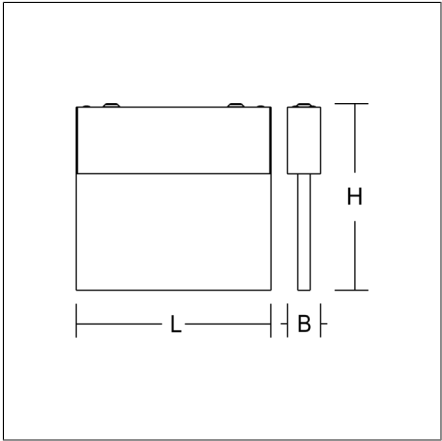

Luminaire for escape route identification. Housing: extruded aluminium profile, anodised or powder-coated. Display panel: highly transparent panel, plastic, with legend on one side/both sides. Electronic ballast included. Self-contained system with automatic self-test and feedback via DALI bus, only to RZB DALI monitoring system. Please indicate legend number when placing your order!

Product specifications

Type of emergency lighting	Self-contained system
Monitoring	DALI-Sibe
Battery	NiMh
Duration	8 h
Operating mode	maintained power mode
Viewing Distance	14 m
Length L	233 mm
Width B	40 mm
Height H	184 mm
Weight	1.03 kg
Light source	LED
Colour temperature	4000 K
Colour rendering index (CRI)	80
Photobiological safety according to EN 62471	Risk group 1
Driver	Electronic ballast
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Type of protection	IP 40
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK03
Ambient temperature for maintained power	0 °C ... + 25 °C
Ambient temperature for non-maintained power mode	5 °C ... + 40 °C
Conformity mark	CE

Accessories



981639.010
Suspension system



981581.004
Wall mounting



981639.040
Suspension system



981701.004
Suspension system

HALYXX

672458.003.1.07 | Luminaires for escape route identification



982763.000
Suspension cable set