



FLAT POLYMERO

672423.002.1 | Combined luminaires for escape route illumination

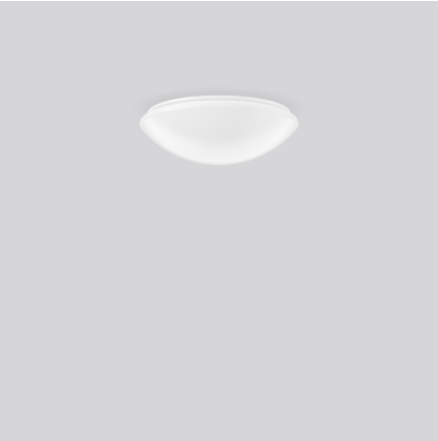

Ceiling and wall luminaires
4051859515500
D 300, H 100

Ceiling mounting, Wall (surface)
white

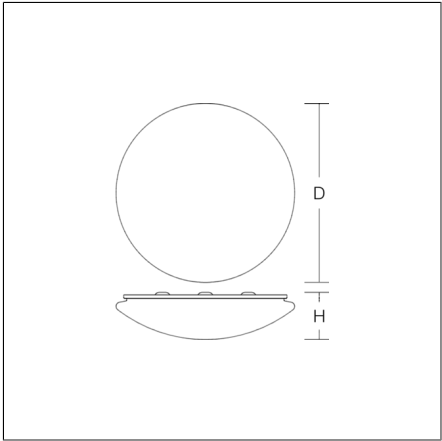

Decorative round surface-mounted luminaire. For escape route illumination. Base: metal, powder-coated. Diffuser made of non-yellowing plastic (PMMA), opal. Diffuser fastening: patented push system. Suitable for Ceiling mounting, Wall (surface). Driver integrated.

Product specifications

Typ of emergency lighting	Central battery system
Monitoring	Power circuit
Battery	without
Operating mode	maintained power mode
Diameter D	300 mm
Height H	100 mm
Weight	1.11 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux, mains operation	1300 lm
System power, mains operation	11 W
Rated luminous flux, emergency operation	330 lm
System power, emergency operation	2,8 W
System efficiency	118 lm/W
Glare evaluation UGR (4H 8H)	20,2
Beam angle	down 119° up 180°
Colour rendering index (CRI)	83
Photobiological safety according to EN 62471	Risk group 1
Driver	Not necessary
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 - 60 Hz
CIE Flux Code / CEN Flux Code	41 69 88 85 100
Type of protection	IP 40
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK03
Ambient temperature for maintained power	-10 °C ... + 35 °C
Ambient temperature for non-maintained power mode	-10 °C ... + 35 °C
Conformity mark	CE