




Recessed downlights  
4051859165910  
D 225, H 4

Recessed ceiling mounting  
white

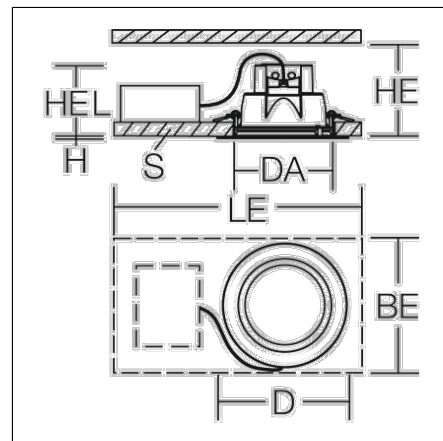

Round recessed downlight. Housing made of UV-resistant polycarbonate. Bezel ring: die-cast aluminium, powder-coated. Aluminium faceted reflector, highly polished anodised finish for brilliant illumination. Satin finish LED diffuser to reduce direct glare. Installation without tools thanks to spring fastening system. Suitable for through-wiring. Electronic ballast included.

### Product specifications

Diameter D	225 mm
Height H	4 mm
Cut-out diameter DA	200 mm
Luminaire: recess height HEL	97 mm
Ceiling thickness S	1-25 mm
Installation space length LE	400 mm
Installation space width BE	400 mm
Installation space height HE	140 mm
Weight	560 g
Light source	LED
Colour temperature	2700 K
Rated luminous flux	2650 lm
System power	26 W
System efficiency	102 lm/W
Glare evaluation UGR (4H 8H)	22,5
Beam angle	71°
Rated life	50000 h (L70/B50)
Colour rendering index (CRI)	80
Colour tolerance	4
Photobiological safety according to EN 62471	Risk group 0
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	3
Luminaires on B16A fuse	5
Luminaires on C10A fuse	6
Luminaires on C16A fuse	10
Inrush current / Inrush current duration	15 A / 95 µs
CIE Flux Code / CEN Flux Code	71 98 100 100 100
Type of protection	IP 44
Protection class	II
Filament test	750°C - 30 seconds
Impact resistance	IK05
Ambient temperature	-30 °C ... + 40 °C
Safety marks	Do not cover the recessed luminaire!
Conformity mark	CE