

# Product Data Sheet

## GW15723




CHORUSMART - Domestic range



Wide range of control devices, sockets for power supply (conforming to national and international standards) signal pick-up, climate control, comfort management, technical alarm signalling and emergency lighting management. The ChoruSmart modular devices are available in five colours, glossy white, satin white, natural beige, satin black and lacquered titanium and in various sizes from 1/2, 1, 2 and 3 modules. Thanks to the mounting supports for rectangular, square and round boxes, endless combinations can be created with the ChoruSmart range of plates.

Category	Relay	Output contacts	10 AX 250V ac
Type	Latching relay, 4 seq.	Colour	Satin White
Description	Latching relay	No. of poles	2P
Voltage	230V ac	Standard	EN 60669-1 - EN 60669-2-2
Frequency	50/60 Hz	Resistance at test voltage	2000 V at 50 Hz for 1 minute
Insulation resistance	> 5 MOhm	Wiring terminals	With screw
Prolonged operation switch (no.of position changes)	40.000 at In 250 V ac cosφ=0,6	Thermo-pressure with ball	125 °C
Glow Wire Test	850 °C	Terminal grip on cable traction	> 50 N
Terminal tightening capacity stranded cables (mm <sup>2</sup> )	1x4 / 2x2,5	Terminal tightening capacity solid cables (mm <sup>2</sup> )	2x2,5
No. modules	1	Rated power (AC1)	2300 VA
Rated power (AC15)	500 VA	230V incandescent-halogen lamps	1000 W
Fluorescent lamps with electronic ballast	400 W	Fluorescent lamps with compensated ballast	360 W
CFL lamps	200 W	230V LED lamps	200 W
Halogen/LED lamps with electronic transformer	200 W	Halogen/LED lamps with electromechanical transformer	400 W
Material	Technopolymer	Electrocod	140

### DIMENSIONAL

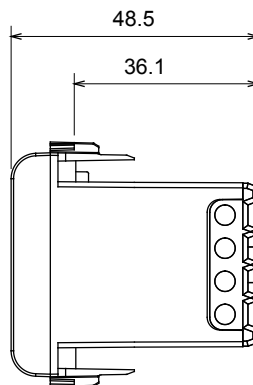

### TECHNICAL SYMBOLOGY



### STANDARDS/APPROVALS

