


FLAT SLIM step

312649.004 | Pendant luminaires



Pendant luminaires
4051859802891
D 530, H 75

pendant
silver, matt (approx. RAL 9006)

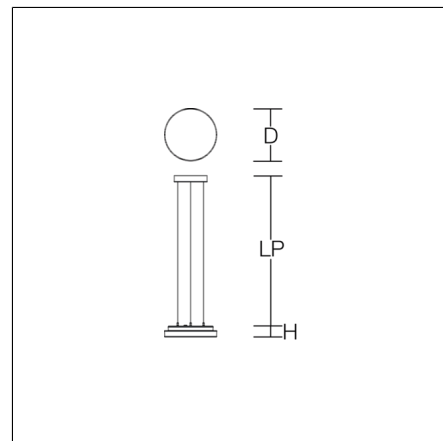

Decorative round LED pendant luminaire. Base: pressure die-cast aluminium, powder-coated. Standard Gore™ Protective Vents diaphragm valve to avoid condensation. Canopy made of aluminium, powder-coated. Mouth blown 3-layer opal glass (Triplex glass) with satin finish. Glass fastening: bayonet fixing. Uniform lighting achieved by the use of LED panel boards. Suitable for pendant. 3-point steel cable suspension, steplessly adjustable. Special lengths available on request. MultiLumen: 2 steps adjustable luminous flux. Factory setting is the highest luminous flux. MultiColour: Colour temperature individually adjustable either 3000 K or 4000 K via switching element. Factory setting is 3000 K.

Product specifications


Diameter D	530 mm
Height H	75 mm
Suspension length LP	500-1500 mm
Weight	8.3 kg
Light source	LED
Colour temperature	3000 K 4000 K
Rated luminous flux	3000 K: 3500 lm 4850 lm 4000 K: 3600 lm 5000 lm
System power	3000 K: 28 W 40 W 4000 K: 28 W 40 W
System efficiency	3000 K: 125 lm/W 121 lm/W 4000 K: 129 lm/W 125 lm/W
Glare evaluation UGR (4H 8H)	3000 K: 21,1 22,2 4000 K: 21,2 22,3
Beam angle	down 124° up 180°
Rated life	50000 h (L90/B50)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	19
Luminaires on B16A fuse	30
Luminaires on C10A fuse	31
Luminaires on C16A fuse	51
Inrush current / Inrush current duration	10 A / 200 µs
CIE Flux Code / CEN Flux Code	42 72 91 83 100
Protection class	I
Filament test	960 °C
Impact resistance	IK02
Ambient temperature	-25 °C ... + 45 °C
Conformity mark	CE, EAC

FLAT SLIM step

312649.004 | Pendant luminaires



Spareparts



982973.002
Replacement LED module



982901.002
Replacement glass