


# FLAT SLIM disc

312638.004.730 | Ceiling and wall luminaires



Ceiling and wall luminaires  
4051859773962  
D 380, H 75

Ceiling mounting, Wall (surface)  
silver, matt (approx. RAL 9006)

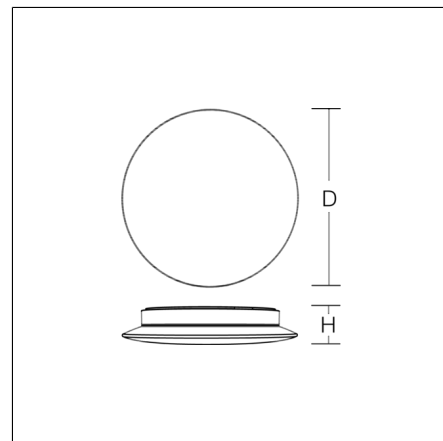

Decorative round LED surface-mounted luminaire for indoor and outdoor use. Base: pressure die-cast aluminium, powder-coated. Standard Gore™ Protective Vents diaphragm valve to avoid condensation. Mouth blown 3-layer opal glass (Triplex glass) with satin finish. Glass fastening: bayonet fixing. Uniform lighting achieved by the use of LED panel boards. Suitable for Ceiling mounting, Wall (surface). Very easy installation thanks to plug & play connection. The large connection compartment on the back for convenient connections is also ideal for through wiring. MultiLumen: 2 steps adjustable luminous flux. Factory setting is the highest luminous flux. MultiColour: Colour temperature individually adjustable either 3000 K or 4000 K via switching element. Factory setting is 3000 K. With Casambi smart+free Bluetooth® control for wireless network and operation using Android / iOS devices, free app available for download.

## Product specifications


|  |  |
|--|--|
| Diameter D                                   | 380 mm   |
| Height H                                     | 75 mm  |
| Weight                                       | 2.75 kg  |
| Light source                                 | LED  |
| Colour temperature                           | 3000 K   4000 K  |
| Rated luminous flux                          | 3000 K: 1150 lm   2450 lm<br>4000 K: 1150 lm   2500 lm     |
| System power                                 | 3000 K: 11 W   24 W<br>4000 K: 11 W   24 W                 |
| System efficiency                            | 3000 K: 105 lm/W   102 lm/W<br>4000 K: 105 lm/W   104 lm/W |
| Glare evaluation UGR (4H 8H)                 | 3000 K: 18,4   21,1<br>4000 K: 18,4   21,1                 |
| Beam angle                                   | down 116°<br>up 130°                                       |
| Rated life                                   | 50000 h (L90/B50)  |
| Colour rendering index (CRI)                 | 80   |
| Colour tolerance                             | 3  |
| Photobiological safety according to EN 62471 | Risk group 1   |
| Driver                                       | Converter, dimmable  |
| Control                                      | smart+free (Bluetooth)                                     |
| Voltage                                      | 220 - 240 V / 50 Hz, 60 Hz                                 |
| Luminaires on B10A fuse                      | 31   |
| Luminaires on B16A fuse                      | 50   |
| Luminaires on C10A fuse                      | 52   |
| Luminaires on C16A fuse                      | 85   |
| Inrush current / Inrush current duration     | 5 A / 50 µs  |
| CIE Flux Code / CEN Flux Code                | 44 75 93 79 100  |
| Type of protection                           | IP 65  |
| Protection class                             | I  |
| Filament test                                | 960 °C   |
| Impact resistance                            | IK02   |
| Ambient temperature                          | -20 °C ... + 35 °C   |
| Safety marks                                 | D-mark   |
| Conformity mark                              | CE, EAC  |

# FLAT SLIM disc

312638.004.730 | Ceiling and wall luminaires



## Spareparts



982971.002  
Replacement LED module



982902.002  
Replacement glass