



# Axyl Greet W

THORN


96700632 AXYL GREETW L U/D 56L 930 WB HF ANT

LED 19W AXYL\_GW\_L\_UD930 IP65 IK04  


## Axyl Greet W

AXYL Greet W, a wall mounted, architectural LED luminaire for decorative facade lighting, with wide beam up and down distribution. Class I electrical.. Fixed output LED driver. , IP65, Impact strength: IK04. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: -20°C to +50°C. Complete with 3000K LED..


Dimensions: 290 x 105 x 43 mm  
Luminaire input power: 18.7 W  
Luminaire luminous flux: 873 lm  
Luminaire efficacy: 47 lm/W  
Weight: 1.66 kg

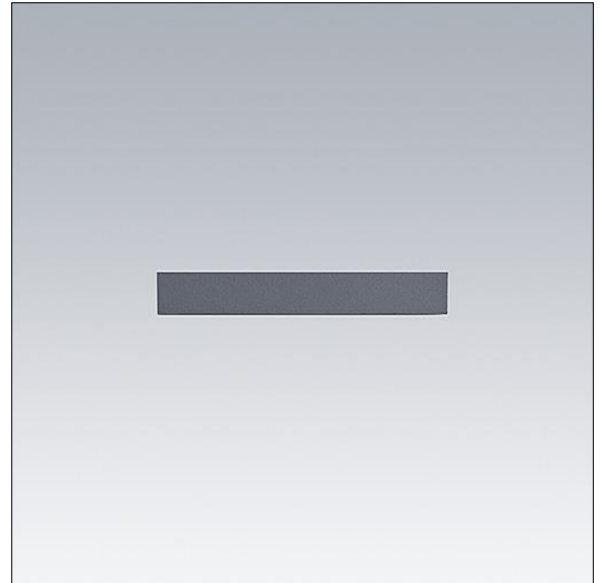

TLG\_AXYL\_F\_GREET\_W\_L\_ANT.jpg

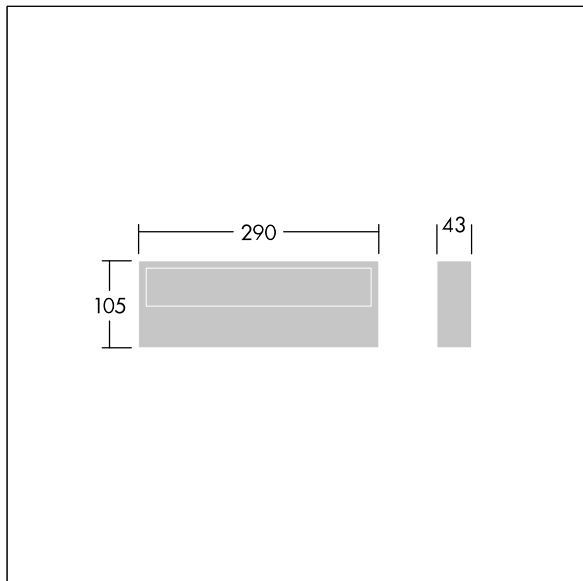

TLG\_AXYL\_M\_GREET\_W\_L.wmf

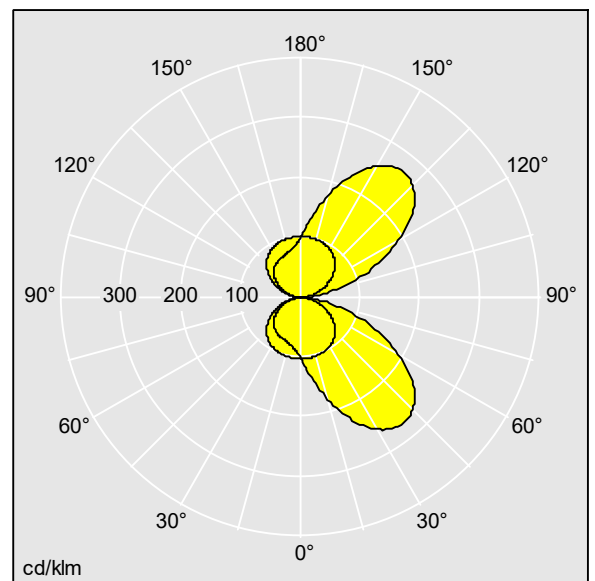

96700632.ltd

Lamp position: STD - standard  
Light Source: LED  
Luminaire luminous flux\*: 873 lm  
Luminaire efficacy\*: 47 lm/W  
Colour Rendering Index min.: 90  
Correlated colour temperature\*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3  
Rated useful life (B10)\*:  
L80 70000 h at 25 °C  
Ballast: 1x LED\_DRV  
Luminaire input power\*: 18.7 W Power factor = 0.99  
Dimming: FIX  
LOR: 1,00 ULOR: 0,50 DLOR: 0,50

This product contains a light source of energy efficiency class C.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting