

Axyl Trim

96700350 AXYL TRIM L BAFF 6L930 A/S HF ANT

THORN

LED 11W AXYL_TR_L_BF-AS930	IP65	IK06	⊕	CE	
----------------------------	------	------	---	----	--


Axyl Trim

AXYL Trim, a wall recessed, architectural LED luminaire for decorative facade lighting, with asymmetrical distribution. Class I electrical.. Fixed output LED driver. , IP65, Impact strength: IK06. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: -20°C to +50°C. Complete with 3000K LED..


Dimensions: 230 x 102 x 95 mm
 Luminaire input power: 10.9 W
 Luminaire luminous flux: 164 lm
 Luminaire efficacy: 15 lm/W
 Weight: 1.36 kg



TLG_AXYL_F_TRIM_L_BAFF_ANT.jpg

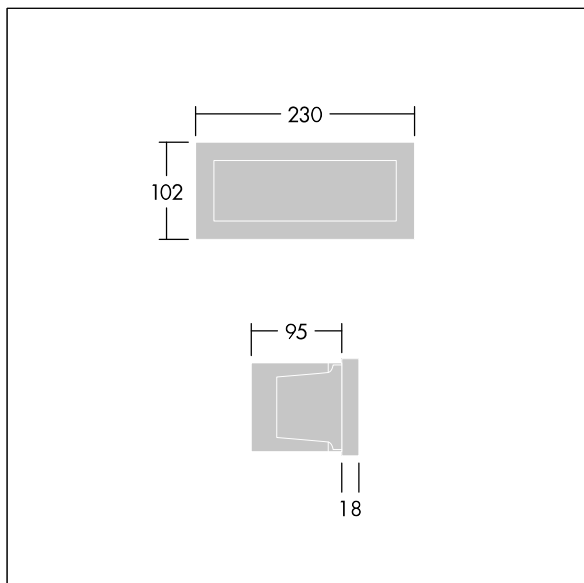

TLG_AXYL_M_TRIM_L.wmf

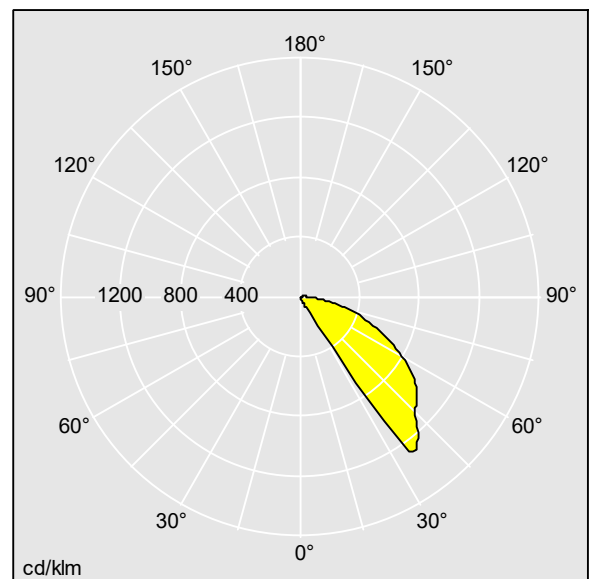

96700350.ltd

Lamp position: STD - standard
 Light Source: LED
 Luminaire luminous flux*: 164 lm
 Luminaire efficacy*: 15 lm/W
 Colour Rendering Index min.: 90
 Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
 Rated useful life (B10)*:
 L80 70000 h at 25 °C
 Ballast: 1x LED_DRV
 Luminaire input power*: 10.9 W Power factor = 0.94
 Dimming: FIX
 LOR: 1,00 ULOR: 0,04 DLOR: 0,96

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting