


CENTRYXX W IP65

672304.002 | Stand-by luminaires for escape route illumination



Wall luminaires
4051859241041
L 79, B 198, H 198

Wall (surface)
white

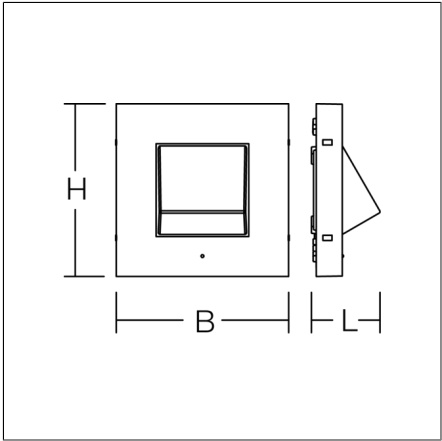

Wall luminaire for escape route illumination. Base: die-cast aluminium, powder-coated Cover: polycarbonate. With plastic lenses for escape route illumination. Vertical swivel. Driver integrated. Suitable for connection to central battery systems. Luminaires with limited surface temperature in accordance with EN 60598-2-24 for use in environments in which a deposit of conductive dust on the luminaire can be expected.

Product specifications

Type of emergency lighting	Central battery system
Monitoring	Power circuit
Battery	without
Operating mode	maintained power mode
Length L	79 mm
Width B	198 mm
Height H	198 mm
Weight	0.78 kg
Light source	LED
Colour temperature	6500 K
Rated luminous flux, mains operation	430 lm 440 lm 450 lm
System power, mains operation	5,9 W 5,9 W 5,9 W
Rated luminous flux, emergency operation	430 lm 440 lm 450 lm
Beam angle	down 69°/75°/14°/75° 70°/77°/13°/77° 76°/77°/6°/77° up 90°/90°/0°/90° 90°/88°/0°/88°
Colour rendering index (CRI)	70
Driver	Electronic ballast
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 Hz, 60 Hz
Luminaires on B10A fuse	18
Luminaires on B16A fuse	29
Luminaires on C10A fuse	36
Luminaires on C16A fuse	58
Inrush current / Inrush current duration	3.3 A / 400 µs
CIE Flux Code / CEN Flux Code	30 58 90 93 100
Type of protection	IP 65
Protection class	I
Filament test	850 °C
Impact resistance	IK08
Ambient temperature for maintained power	-20 °C ... + 40 °C
Ambient temperature for non-maintained power mode	-20 °C ... + 40 °C
Safety marks	D-mark
Conformity mark	CE

CENTRYXX W IP65

672304.002 | Stand-by luminaires for escape route illumination



Accessories



982274.002

Mounting set for through wiring surface installation