


# ANDHO midi

931196.0031.76 | Surface mounted downlights



Surface mounted downlights  
4051859494867  
D 154, H 157

Ceiling mounting  
anthracite metallic (DB703)

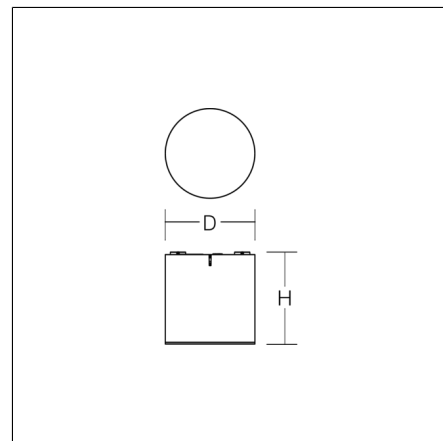

High-quality surface-mounted downlight for indoor and outdoor use. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. With membrane valve as a standard to avoid condensed water. Cover clear single-pane toughened glass. Rotation-symmetric reflector made of reflex-boosted MIRO-SILVER®. Easy installation with a separate ceiling frame and plug connection.. 5 pole double terminal for through-wiring.

## Product specifications

|  |                            |
|--|----------------------------|
| Diameter D                                   | 154 mm                     |
| Height H                                     | 157 mm                     |
| Weight                                       | 2.6 kg                     |
| Light source                                 | LED                        |
| Colour temperature                           | 3000 K                     |
| Rated luminous flux                          | 2000 lm                    |
| System power                                 | 15 W                       |
| System efficiency                            | 133 lm/W                   |
| Glare evaluation UGR (4H 8H)                 | 18,7                       |
| Beam angle                                   | 63°                        |
| Rated life                                   | 50000 h (L80/B10)          |
| Colour rendering index (CRI)                 | 80                         |
| Colour tolerance                             | 2                          |
| Photobiological safety according to EN 62471 | Risk group 1               |
| Driver                                       | Converter, dimmable        |
| Control                                      | DALI                       |
| Voltage                                      | 220 - 240 V / 50 Hz, 60 Hz |
| Luminaires on B10A fuse                      | 21                         |
| Luminaires on B16A fuse                      | 34                         |
| Luminaires on C10A fuse                      | 35                         |
| Luminaires on C16A fuse                      | 57                         |
| Inrush current / Inrush current duration     | 18 A / 250 µs              |
| CIE Flux Code / CEN Flux Code                | 94 98 99 100 100           |
| Type of protection                           | IP 65                      |
| Protection class                             | I                          |
| Filament test                                | 960 °C                     |
| Impact resistance                            | IK08                       |
| Ambient temperature                          | -20 °C ... + 40 °C         |
| Conformity mark                              | CE, EAC                    |

## Accessories




982716.0031  
Pendant set, 3 m with 5-pin power cable (IP 68)



982720.0031  
Pendant set, 5 m with 5-pin power cable (IP 68)

# ANDHO midi

931196.0031.76 | Surface mounted downlights



982160.000  
Reeded glass