



MASTER LEDtube EM/ Mains T8



MAS LEDtube 900mm HO 12W 865 T8

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance, which cannot be distinguished from traditional fluorescent. These T8 LED tubes are the right choice for absolute performance and are designed to stand up to everyday conditions. Unparalleled savings thanks to low energy consumption and an exceptionally long lifetime ensure this tube masters every demanding application.

Warnings and Safety

- NOTE: The overall energy efficiency and light distribution of any installation that uses these lamps will be determined by the design of the installation.

Product data

General Information		Color Consistency	
Cap-Base	G13 ROT	Color Consistency	<6
Nominal lifetime	75,000 hour(s)	Color rendering index (CRI)	80
Switching Cycle	200,000	LLMF At End Of Nominal Lifetime (Nom)	70 %
Lighting Technology	LED	Photobiological safety according to EN 62471	RG0
Flux measurement reference	Sphere	Operating and Electrical	
Light Technical		Line Frequency	50 to 60 Hz
Color Code	865 [CCT of 6500K]	Input Frequency	50 to 60 Hz
Beam Angle (Nom)	160 degree(s)	Power Consumption	12 W
Luminous Flux	1,575 lm	Lamp Current (Max)	60 mA
Color Designation	Cool Daylight	Lamp Current (Min)	50 mA
Correlated Color Temperature (Nom)	6500 K	Starting Time (Nom)	0.5 s
Luminous Efficacy (rated) (Nom)	131 lm/W	Warm-up time to 60% light	0.5 s
		Power Factor (Fraction)	0.9

MASTER LEDtube EM/Mains T8

Voltage (Nom)	220-240 V
Ballast Compatibility	EM/Mains
LED alternative to fluorescent lamp power	30 W
Inrush current at mains	8
Max. lamp no. on MCB B type 10A – Mains	90
Max. lamp no. on MCB B type 10A – EM ballast without Compensation Capacitor.	125
Max. lamp no. on MCB B type 10A – EM ballast with Compensation Capacitor.	15
Max. lamp no. on MCB B type 16A – Mains	150
Max. lamp no. on MCB B type 16A – EM ballast without Compensation Capacitor.	200
Max. lamp no. on MCB B type 16A – EM ballast with Compensation Capacitor.	25

Temperature

T-Case Maximum (Nom)	50 °C
----------------------	-------

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Finish	Frosted
Bulb Material	Plastic
Product Length	900 mm
Bulb Shape	T8
Net Weight (Piece)	0.180 kg


Approval and Application

Energy Efficiency Class	E
Energy Saving Product	Yes
Approval Marks	RoHS compliance CE marking KEMA Keur certificate ENEC certificate
Energy Consumption kWh/1000 h	12 kWh
EPREL Registration Number	1206964
CE mark	Yes
EU RoHS compliant	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	0.5
Stroboscopic effect visibility measure (SVM)	0.2
Ambient temperature range	-20 °C to 45 °C

Product Data

Order product name	MAS LEDtube 900mm HO 12W 865 T8
Full product name	MAS LEDtube 900mm HO 12W 865 T8
Full product code	871869668710900
Order code	929001298502
Material Nr. (12NC)	929001298502
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696687109
Numerator - Packs per outer box	10
EAN/UPC - Case	8718696687116



Dimensional drawing

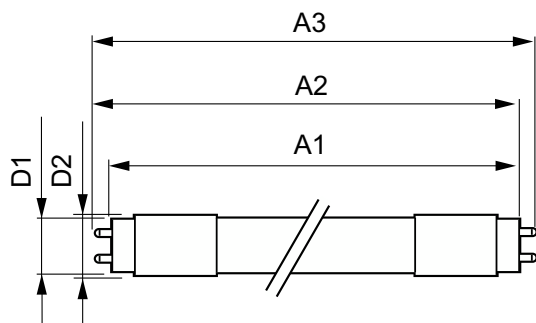

Product	D1	D2	A1	A2	A3
MAS LEDtube 900mm HO 12W 865 T8	25.78 mm	28 mm	893.3 mm	900.4 mm	907.5 mm


MASTER LEDtube EM/Mains T8

Photometric data




Light Distribution Diagram - MAS LEDtube 900mm HO 12W 865 T8

General uniform lighting - MAS LEDtube 900mm HO 12W 865 T8

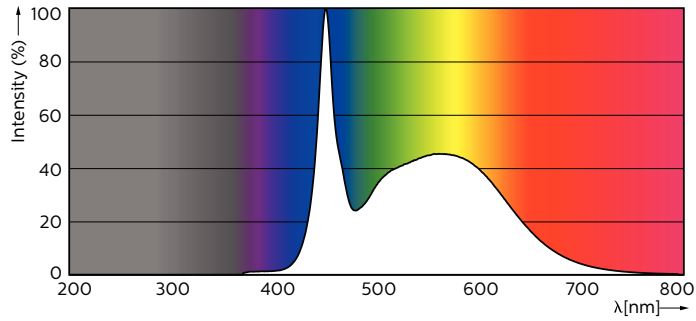


Spectral Power Distribution Colour - MAS LEDtube 900mm HO 12W 865 T8

Lifetime

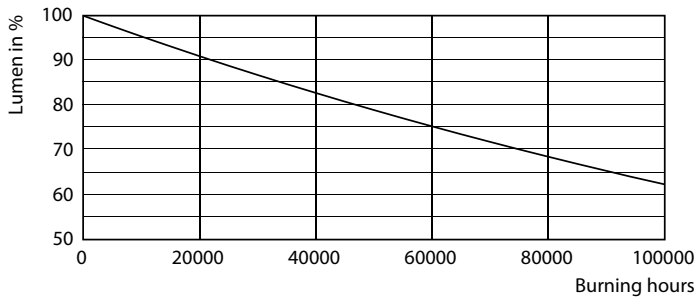



Lumen Maintenance Diagram - MAS LEDtube 900mm HO 12W 865 T8

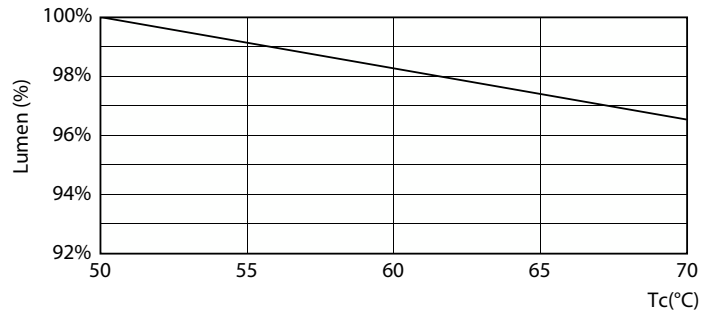

Lumen Maintenance Diagram - MAS LEDtube 900mm HO 12W 865 T8


MASTER LEDtube EM/Mains T8

Lifetime

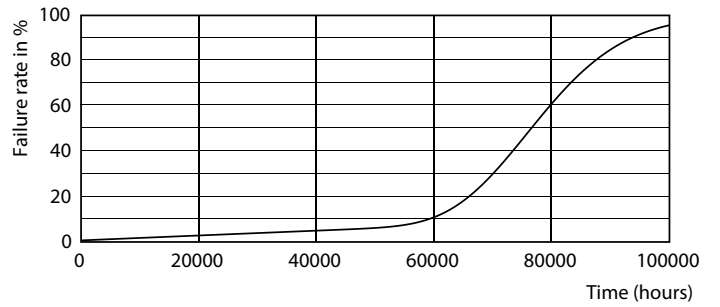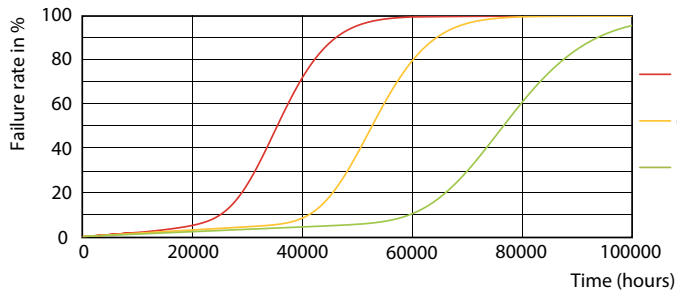

LEDtube-75K-5070-FailureRate-LED

Life Expectancy Diagram

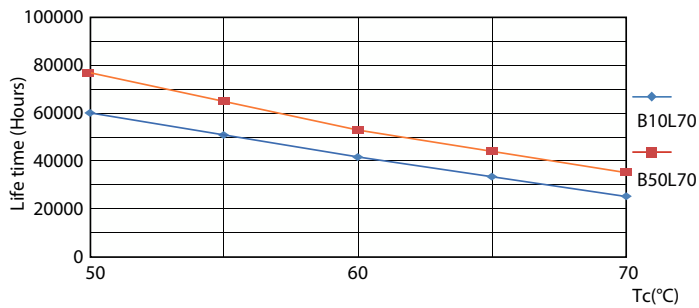

LifetimeVsTc

