



FLAT POLYMERO KREIS

672396.002.89 | Combined luminaires for escape route illumination

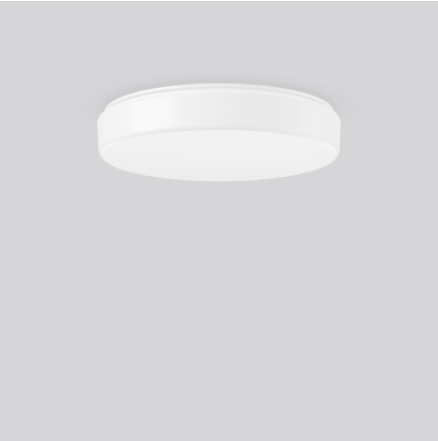

Ceiling and wall luminaires
4051859431336
D 460, H 93

Ceiling mounting, Wall (surface)
white

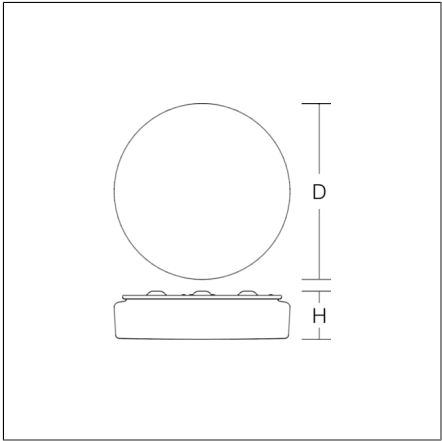

Decorative round surface-mounted luminaire. For escape route illumination. Base: metal, powder-coated. Diffuser made of non-yellowing plastic (PMMA), opal. Diffuser fastening: patented push system. Suitable for Ceiling mounting, Wall (surface). Driver integrated. Suitable for connection to central battery systems. With AC Control monitoring module for LUXIFAIR central battery units.

Product specifications

Type of emergency lighting	Central battery system
Monitoring	Luxifair AC-Control
Battery	without
Operating mode	maintained power mode
Diameter D	460 mm
Height H	93 mm
Weight	2.73 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux, mains operation	1850 lm
System power, mains operation	20 W
Rated luminous flux, emergency operation	460 lm
System power, emergency operation	6,5 W
System efficiency	93 lm/W
Glare evaluation UGR (4H 8H)	18,7
Beam angle	down 123° up 180°
Colour rendering index (CRI)	83
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Not necessary
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 - 60 Hz
CIE Flux Code / CEN Flux Code	42 73 92 86 100
Type of protection	IP 40
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK03
Ambient temperature for maintained power	-10 °C ... + 35 °C
Conformity mark	CE, EAC

Spareparts



08-311600.002
Replacement diffuser