

## KombiSIGN 50 / Permanent Beacon 846

## Perm. light element 12-230VAC/DC YE



Part No.	846.300.00
Series:	KombiSIGN 50

MECHANICAL DATA		
Height	67 mm	
Diameter	52 mm	
Materials	PC	
Dome colour	Yellow	
Protection category	IP54	
Tension relief	Not present	
Working temperature minimum	-20°C	
Working temperature maximum	+50°C	
Weight with packaging	50 g	
Product weight	40 g	

ELECTRICAL DATA			
Operating voltage	12-230V		
Operating voltage type	AC/DC		
Protection class	Protection class 2		
Pollution degree	3		
Overvoltage category	II		
Isolation voltage	Ui = 250V; Uimp = 2.500V		
Power illuminant	max. 5W		

OPTICAL DATA	
Light colour	Yellow
Service life optical	depends on bulb
Lamp fitting/socket	B15d

APPROVAL DATA				
Conforms with CE	Yes			
Conforms with RoHS directive	Yes			
WEEE	Yes			
Conforms with ATEX-directive	No			
Conforms with CCC	No			
Conforms with UL	cULus			
UL Type Rating	Type 12			
Conforms with FCC	No			
Conforms with IC	No			
EAC certificate available	Yes			
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)			
Conforms with CMIM	No			
Conforms with AS-I	No			


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



## KombiSIGN 50 / Permanent Beacon 846

## Perm. light element 12-230VAC/DC YE

ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

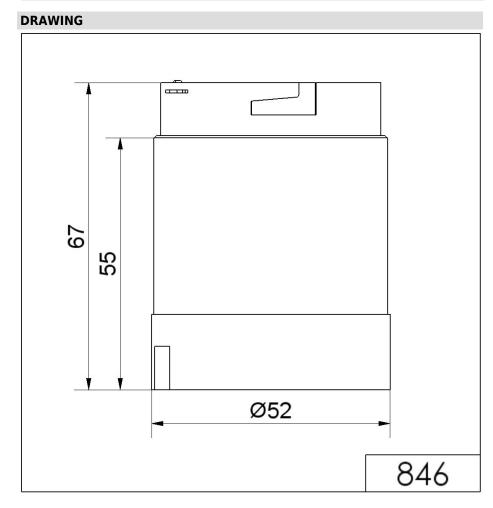

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.