

# PRODUCT DATASHEET

## FL PFM 200 W 4000 K SYM 100 SL BK

FLOODLIGHT PHOTOCELL 200 W | Floodlight with daylight sensor, 200 W power consumption



### Areas of application

- Replacement for floodlights with halogen lamps
- Outdoor use (IP65)
- Industry
- Public areas
- Construction areas
- Building facades

### Product benefits

- Bright, robust and durable
- Automatically switches on and off according to the amount of available daylight
- Always-on override, activated via special mains switching pattern
- Safe and very uniform illumination, due to frosted and tempered glass diffuser
- No upper light output ratio (ULOR 0%) when mounted at 0° tilt
- Energy savings of up to 90 % compared to halogen lamp floodlights
- 5 years guarantee

### Product features

- Daylight sensor, integrated in glass cover
- Switch on below 35 lux, switch off above 95 lux illuminance
- Reflector-based, symmetric light distribution with 100° x 100° beam angle
- Integrated wide voltage driver, suitable for 100 - 277 V AC
- Surge protection: up to 6 kV (L/N-PE), 4 kV (L-N)
- Mounting bracket with 30° angle and wide rotation area



- Breather membrane to optimize air exchange, without compromising IP protection
- Pre-installed, flexible 1 m cable (H05RN-F), wrapped 3 x 1.0 mm<sup>2</sup> single wires


## TECHNICAL DATA

### Electrical data


|   |                       |
|---|-----------------------|
| Nominal wattage   | 200.00 W              |
| Nominal voltage   | 100...277 V           |
| Mains frequency   | 50...60 Hz            |
| Nominal current   | 1000 mA               |
| Inrush current  | 80 A                  |
| Inrush current time $T_{h50}$                               | 1000 $\mu$ s          |
| Max. number of luminaires per miniature circuit breaker B16 | 3                     |
| Max. number of luminaires per miniature circuit breaker C10 | 5                     |
| Max. number of luminaires per miniature circuit breaker C16 | 8                     |
| Power factor $\lambda$                                      | > 0.90                |
| Total harmonic distortion                                   | < 20 %                |
| Protection class  | I                     |
| Operating mode  | Integrated LED driver |

### Photometrical data


|  |                           |
|--|---------------------------|
| Luminous flux                                | 25000 lm                  |
| Luminous efficacy                            | 125 lm/W                  |
| Color temperature                            | 4000 K                    |
| Light color (designation)                    | Cool White                |
| Color rendering index Ra                     | $\geq 80$                 |
| Standard deviation of color matching         | $\leq 5$ sdc <sub>m</sub> |
| Luminous intensity                           | -                         |
| Low flicker                                  | Yes                       |
| Flickering metric (Pst LM)                   | -                         |
| Stroboscope effect metric (SVM)              | -                         |
| Photobiological safety group acc. to EN62778 | RG1                       |
| Photobiological safety group acc. to EN62471 | RG1                       |
| Beam angle                                   | 100 ° x 100 °             |




FL PFM200W4000K SYM100SL BK



FL PFM 200W 4000K SYM100SL BK




FL PFM200W4000K SYM100SL BK



FL PFM 200W 4000K SYM100SL BK

Dimensions & Weight

|                |           |
|----------------|-----------|
| Length         | 454.00 mm |
| Width          | 354.00 mm |
| Height         | 62.00 mm  |
| Product weight | 6000.00 g |
| Cable length   | 1000 mm   |

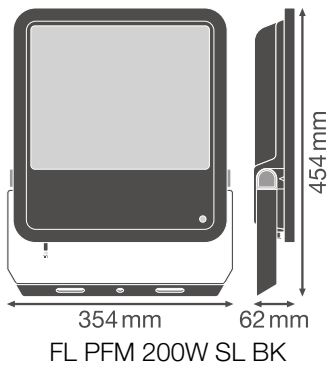

## Materials & Colors

|  |          |
|--|----------|
| Product color                              | Black    |
| Housing color                              | Black    |
| Body material                              | Aluminum |
| Light emitting surface material            | Glass    |
| Glow Wire Test according to IEC 60695-2-12 | 650 °C   |
| Mercury content                            | 0.0 mg   |

## Application & Mounting

|  |                     |
|--|---------------------|
| Ambient temperature range              | -30...+50 °C        |
| Temperature range at storage           | -40...+70 °C        |
| Type of connection                     | Cable, 3-pole       |
| Type of protection                     | IP65                |
| Protection class IK (shock resistance) | IK08                |
| Dimmable                               | No                  |
| Mounting type                          | Surface             |
| Mounting location                      | Wall / Pole / Floor |
| Application environment                | Outdoor             |
| Adjustable                             | Yes                 |
| With light source                      | Yes                 |

## Lifespan

|                            |                       |
|----------------------------|-----------------------|
| Lifespan L70/B50 at 25 °C  | 70000 h <sup>1)</sup> |
| Lifespan L80/B10 at 25 °C  | 55000 h <sup>1)</sup> |
| Lifespan L80/B50 at 25 °C  | 55000 h               |
| Lifespan L90/B10 at 25 °C  | 35000 h               |
| Number of switching cycles | 100000                |

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

## Control gear

|                             |         |
|-----------------------------|---------|
| Output current              | 1100 mA |
| ECG - Output ripple current | < 35 %  |

## Sensor

|                |       |
|----------------|-------|
| Type of sensor | Light |
|----------------|-------|

|  |            |
|--|------------|
| Sensor technology                      | Photocell  |
| Detection threshold of daylight sensor | 35...95 lx |
| Sensor IP rating                       | IP65       |








### Certificates & Standards













|  |                            |
|--|----------------------------|
| Standards  | CE / CB / ENEC / EAC / EPD |
| Luminaire with limited surface temperature, "D sign" | No                         |
| Ball shot safe                                       | No                         |
| EPD  | LEDV-00017-V01.01-EN       |
| Replaceable light source (EPREL)                     | Not replaceable            |



### Safety advice


- Max. wind load surface 0.124 m<sup>2</sup>
- All electrical connections must be made by a qualified person.
- The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.
- Terminal block not included. Installation must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.

### DOWNLOAD DATA

|  | Documents and certificates             | Document name                      |
|--|--|------------------------------------|
|  | User instruction / safety instructions | FLOODLIGHT PHOTOCELL 65W - 200W    |
|  | Legal information                      | Legal insert                       |
|  | Legal information                      | LSI FL PFM SYM                     |
|  | Legal information                      | Legal Insert FL PFM                |
|  | Legal information                      | Informationstext 18 Abs 4 ElektroG |
|  | Declarations of conformity             | FL PFM SYM SL BK                   |
|  | Declarations of conformity UKCA        | FL PFM 4000K SYM100SL BK           |

| Photometric and lighting design files  |                                     | Document name                 |
|--|-------------------------------------|-------------------------------|
|    | IES file (IES)                      | FL PFM200W4000K SYM100SL BK   |
|    | IES file (IES)                      | FL PFM 200W 4000K SYM100SL BK |
|    | LDT file (Eulumdat)                 | FL PFM200W4000K SYM100SL BK   |
|    | LDT file (Eulumdat)                 | FL PFM 200W 4000K SYM100SL BK |
|    | ULD file (DIALux)                   | FL PFM200W-4000K SYM100SL BK  |
|    | ROLF file (RELUX)                   | FL PFM200W-4000K              |
|    | UGR file (UGR table)                | FL PFM200W4000K SYM100SL BK   |
|    | UGR file (UGR table)                | FL PFM 200W 4000K SYM100SL BK |
|   | Light distribution curve type cone  | FL PFM200W4000K SYM100SL BK   |
|  | Light distribution curve type cone  | FL PFM 200W 4000K SYM100SL BK |
|  | Light distribution curve type polar | FL PFM200W4000K SYM100SL BK   |
|  | Light distribution curve type polar | FL PFM 200W 4000K SYM100SL BK |

| CAD/BIM files  |              | Document name           |
|--|--------------|-------------------------|
|  | BIM Revit 3D | Floodlight Photocell G3 |
|  | CAD STEP 3D  | FL G3 200W              |


| Tender texts   |                  | Document name                                       |
|--|------------------|---|
|  | Tender documents | FLOODLIGHT PHOTOCCELL 200 W 4000 K SYM 100 SL BK-EN |

**LOGISTICAL DATA**




| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume                |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075461208 | Shipping box<br>1            | 407 mm x 95 mm x 516 mm              | 6665.00 g    | 19.95 dm <sup>3</sup> |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



|       | A   | B   | C    | ⚙      | ☀                    |
|-------|-----|-----|------|--------|----------------------|
| 65 W  | 150 | 108 | 8,5  | 2x M8  | 0,046 m <sup>2</sup> |
| 80 W  | 150 | 108 | 10,5 | 2x M10 | 0,061 m <sup>2</sup> |
| 125 W | 170 | 118 | 10,5 | 2x M10 | 0,083 m <sup>2</sup> |
| 165 W | 170 | 118 | 12,5 | 2x M12 | 0,102 m <sup>2</sup> |
| 200 W | 170 | 118 | 12,5 | 2x M12 | 0,124 m <sup>2</sup> |



References / Links

- For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.