


FLAT POLYMERO KREIS

311999.002.2 | Pendant luminaires



Pendant luminaires
4051859155843
D 515, H 98

pendant
white

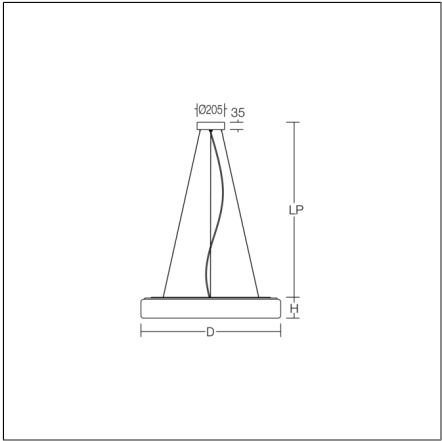

Decorative round LED pendant luminaire. Base and canopy: metal, powder-coated, white. Canopy Ø 205 mm, h 35 mm. Diffuser made of plastic (polycarbonate), opal, shockproof. Diffuser fastening: patented push system. Homogeneous and smooth light distribution. Suitable for pendant. 3-point steel cable suspension, steplessly adjustable. Special lengths available on request.

Product specifications

Diameter D	515 mm
Height H	98 mm
Suspension length LP	350-1300 mm
Weight	5.38 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	3500 lm
System power	28 W
System efficiency	125 lm/W
Glare evaluation UGR (4H 8H)	20,4
Beam angle	down 126° up 180°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	83
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	Phase cut-off/cut-on
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	53
Luminaires on B16A fuse	85
Luminaires on C10A fuse	53
Luminaires on C16A fuse	85
Inrush current / Inrush current duration	0.2 A / 10000 µs
CIE Flux Code / CEN Flux Code	41 71 90 84 100
Type of protection	IP 40
Protection class	I
Filament test	850°C - 30 seconds
Impact resistance	IK10
Ambient temperature	25 °C
Conformity mark	CE, EAC

FLAT POLYMERO KREIS

311999.002.2 | Pendant luminaires



Spareparts



08-311604.022
Replacement diffuser