

## KombiSIGN 71 / LED Revolving Signal Beacon 644

### LED Rotating light el. 24VAC/DC YE



|                  |                     |
|------------------|---------------------|
| <b>Part No.:</b> | <b>644.330.75</b>   |
| <b>Series:</b>   | <b>KombiSIGN 71</b> |



#### MECHANICAL DATA

|                             |        |
|-----------------------------|--------|
| Height                      | 66 mm  |
| Diameter                    | 70 mm  |
| Materials                   | PC     |
| Dome colour                 | Yellow |
| Protection category         | IP65   |
| Working temperature minimum | -20°C  |
| Working temperature maximum | +50°C  |
| Weight with packaging       | 83 g   |
| Product weight              | 66 g   |

#### ELECTRICAL DATA

|                             |                    |
|-----------------------------|--------------------|
| Operating voltage           | 24V                |
| Operating voltage type      | AC/DC              |
| Operating voltage frequency | 50Hz               |
| Operating voltage tolerance | +/- 10%            |
| Rated operational voltage   | 24 VDC             |
| Rated operational current   | 40 mA              |
| Rated inrush current        | 500 mA             |
| Protection class            | Protection class 2 |
| Pollution degree            | 3                  |

#### OPTICAL DATA

|                      |                   |
|----------------------|-------------------|
| Light source         | LED               |
| Light colour         | Yellow            |
| Optical signal image | Revolving         |
| Service life optical | 100,000 h maximum |
| Rotation speed (rpm) | 120 U/min         |

#### APPROVAL DATA

|                              |         |
|------------------------------|---------|
| Conforms with CE             | Yes     |
| Conforms with RoHS directive | Yes     |
| WEEE                         | Yes     |
| Conforms with ATEX-directive | No      |
| Conforms with CCC            | No      |
| Conforms with UL             | cULus   |
| UL Type Rating               | Type 12 |
| Conforms with FCC            | No      |
| Conforms with IC             | No      |
| EAC certificate available    | Yes     |




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / LED Revolving Signal Beacon 644  
**LED Rotating light el. 24VAC/DC YE**

|                               |                       |
|-------------------------------|-----------------------|
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with CMIM            | No                    |
| Conforms with AS-I            | No                    |
| ICAO Certification            | No                    |
| Conforms with DNV             | No                    |
| Conforms with RoHS CN         | No                    |
| Conforms with VdS             | No                    |

**DRAWING**

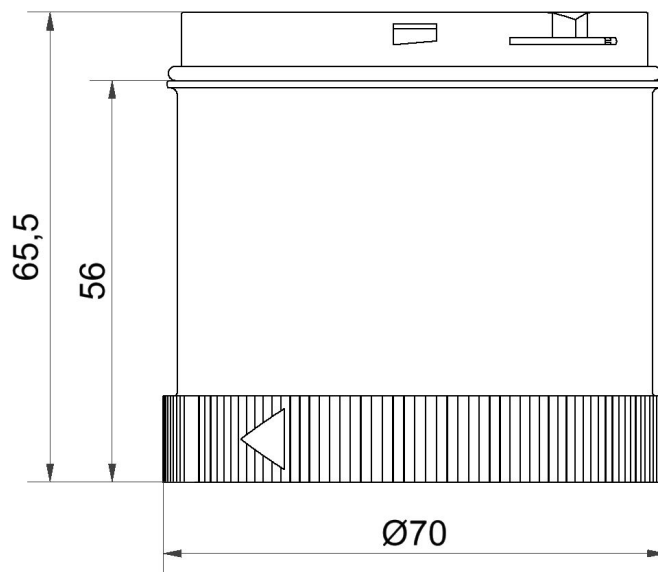

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.