


# MEGA TOWER F

621097.024.1 | Wall luminaires



Wall luminaires  
4051859511373  
L 160, B 115, H 303

Wall (surface)  
silver, matt (approx. RAL 9006)

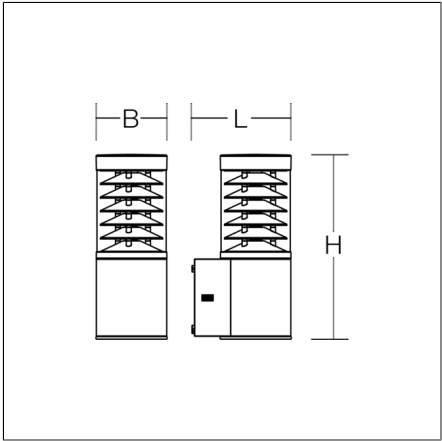

Attractive wall luminaire with innovative housing design and high-quality LED optics. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. With membrane valve as a standard to avoid condensed water. Luminaire head made of corrosion-resistant pressure die-cast aluminium, powder-coated, with transparent cylinder (glass) and translucent anti-glare louvres. Light emission: downwards. Flood. Switchable separately. Fixing on the wall outside the sealed volume, drill hole deviations can be compensated. Screwless luminaire fixing via RZB Gravalock® System. Connection box on base, max. 2 x 5 x 2.5 mm² for loop through.

### Product specifications


Length L	160 mm
Width B	115 mm
Height H	303 mm
Weight	3.1 kg
Light source	LED
Colour temperature	#4000 K   #4000 K
Rated luminous flux	780 lm
System power	14 W
System efficiency	56 lm/W
Glare evaluation UGR (4H 8H)	23,3
Beam angle	down 76°/78°/76°/78° up 90°/90°/90°/90°
Rated life	60000 h (L80/B50)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 - 60 Hz
Luminaires on B10A fuse	39
Luminaires on B16A fuse	63
Luminaires on C10A fuse	63
Luminaires on C16A fuse	100
Inrush current / Inrush current duration	8 A / 5 µs
CIE Flux Code / CEN Flux Code	33 51 78 71 100
Type of protection	IP 65
Protection class	I
Filament test	960°C - 30 seconds
Impact resistance	IK04
Ambient temperature	-20 °C ... + 45 °C
Conformity mark	CE, EAC

# MEGA TOWER F

621097.024.1 | Wall luminaires



## Spareparts



982260.004  
Luminaire head, silver