


# LIGHTSTREAM mini

722144.114 | Spotlights



Spotlights  
4051859428404  
L 315, B 276, H 180

Universal mounting system  
silver, matt (approx. RAL 9006)

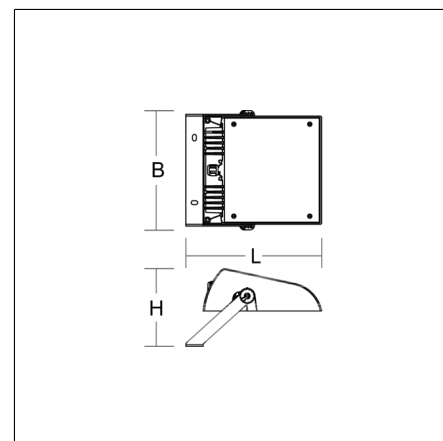


LED floodlight for accent and area lighting. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. Bracket: aluminium, powder-coated. Tilt angle can be adjusted with angular scale. With membrane valve as a standard to avoid condensed water. Asymmetrical area flood reflector of MIRO-SILVER® with reflex-boosted coating. Toughened glass cover. COB LED with socket for easy replacement. Asymmetrical light distribution. Quick connection possible without opening the housing by screw-less plug connector on bayonet locked slide. Piano-key terminal up to 5 x 2,5 mm<sup>2</sup>, max cable Ø 13 mm. Windage area Aw = 0,023 m<sup>2</sup>.

## Product specifications

Length L	315 mm
Width B	276 mm
Height H	180 mm
Weight	3.4 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	3200 lm
System power	25 W
System efficiency	128 lm/W
Glare evaluation UGR (4H 8H)	38,6
Beam angle	63°/43°/0°/43°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	31
Luminaires on B16A fuse	50
Luminaires on C10A fuse	52
Luminaires on C16A fuse	85
Inrush current / Inrush current duration	5 A / 50 µs
CIE Flux Code / CEN Flux Code	29 69 96 100 100
Type of protection	IP 65
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK04
Ambient temperature	-25 °C ... + 42 °C
Safety marks	D-mark
Conformity mark	CE, EAC

## Accessories



982047.000  
Pole attachment (single): for spigot 60 mm, unpainted



982047.004  
Pole attachment (single): for spigot 60 mm, silver, matt (approx. RAL 9006)



982048.000  
Pole attachment (single): for spigot 76 mm, unpainted



982048.004  
Pole attachment (single): for spigot 76 mm, silver, matt (approx. RAL 9006)



982049.000  
Pole attachment (double): for spigot 60 mm, unpainted



982049.004  
Pole attachment (double): for spigot 60 mm, silver, matt (approx. RAL 9006)



982050.000  
Pole attachment (double): for spigot 76 mm, unpainted



982050.004  
Pole attachment (double): for spigot 76 mm, silver, matt (approx. RAL 9006)



982092.000  
Pole clip for pole diameter 95 - 114 mm



982093.000  
Pole clip for pole diameter 115 - 135 mm



982086.000  
Wall bracket, 1000 mm, uncoated



982058.000  
Wall bracket, 500 mm, uncoated




982524.004  
Adapter set for 4-fold configuration (4 x 90°)



982638.003  
Junction box H with strain relief.

## Spareparts



982407.003  
Spare glass