


FLAT SLIM round

672658.002 |



Ceiling and wall luminaires
4051859981282
D 400, H 70

Ceiling mounting, Wall (surface)
traffic white, matt (RAL 9016)

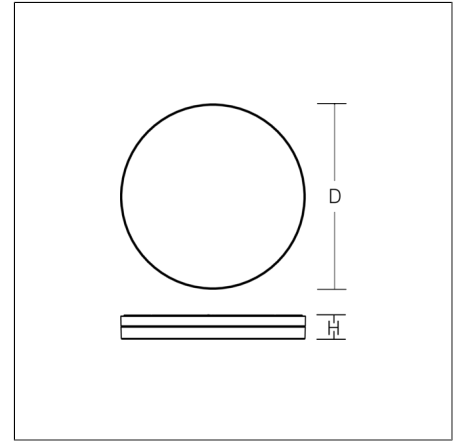

Decorative round surface-mounted luminaire for indoor and outdoor use. Base: pressure die-cast aluminium, powder-coated. Standard Gore™ Protective Vents diaphragm valve to avoid condensation. Mouth blown 3-layer opal glass (Triplex glass) with satin finish. Glass fastening: bayonet fixing. Uniform lighting achieved by the use of LED panel boards. Suitable for Ceiling mounting, Wall (surface). Very easy installation thanks to plug & play connection. The large connection compartment on the back for convenient connections is also ideal for through wiring. Electronic ballast included. Self-contained system with automatic self-test.

FLAT SLIM round

672658.002 |



Product specifications

Typ of emergency lighting	Self-contained system
Monitoring	Autotest
Battery	LiFePO4
Duration	8 h
Operating mode	maintained power mode
Diameter D	400 mm
Height H	70 mm
Weight	4.4 kg
Light source	LED
Colour temperature	3000 K 4000 K
Rated luminous flux, mains operation	3000 K: 2450 lm 3850 lm
	4000 K: 2500 lm 4000 lm
System power, mains operation	3000 K: 28 W 43 W
	4000 K: 28 W 43 W
Rated luminous flux, emergency operation	120 lm
System efficiency	3000 K: 88 lm/W 90 lm/W
	4000 K: 89 lm/W 93 lm/W
Glare evaluation UGR (4H 8H)	3000 K: 22,1 23,6
	4000 K: 22,1 23,8
Beam angle	down 131° up 180°
Rated life	50000 h
Colour rendering index (CRI)	80
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	31
Luminaires on B16A fuse	50
Luminaires on C10A fuse	52
Luminaires on C16A fuse	85
Inrush current / Inrush current duration	5 A / 50 µs
CIE Flux Code / CEN Flux Code	39 69 89 84 100
Type of protection	IP 65
Protection class	I
Filament test	960 °C
Impact resistance	IK03
Ambient temperature for maintained power	5 °C ... + 25 °C
Safety marks	D-mark
Conformity mark	CE, EAC