



NADELSPOT

582027.004 | Wall luminaires

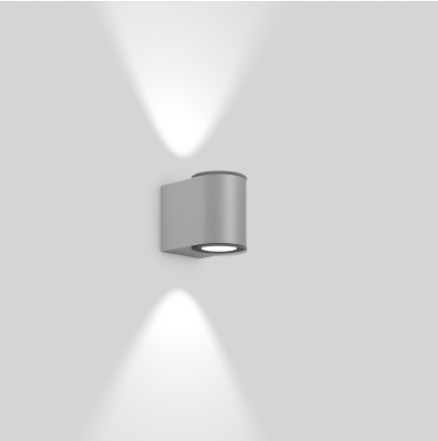

Wall luminaires
4051859228318
L 100, B 154, H 127

Wall (surface)
silver, matt (approx. RAL 9006)

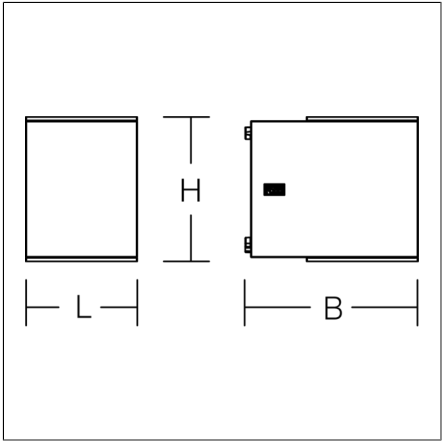

Wallscapeing: elegant and innovative wall luminaire for accent lighting. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. With membrane valve as a standard to avoid condensed water. Cover made of ceramic-coated toughened glass with bayonet lock. With mains voltage LED module. Light emission upwards and downwards, flood/flood. Fixing on the wall outside the sealed volume, drill hole deviations can be compensated. Screwless luminaire fixing via RZB Gravalock® System. Electrical plug and play featuring quick connector. Cable entry granting two cables for loop-through.

Product specifications

Length L	100 mm
Width B	154 mm
Height H	127 mm
Weight	1.8 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	280 lm
System power	8 W
System efficiency	35 lm/W
Glare evaluation UGR (4H 8H)	15,1
Beam angle	down 40°/34°/27°/34° up 35°/34°/22°/34°
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Not necessary
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	31
Luminaires on B16A fuse	50
Luminaires on C10A fuse	52
Luminaires on C16A fuse	85
Inrush current / Inrush current duration	20 A / 170 µs
CIE Flux Code / CEN Flux Code	96 99 100 48 100
Type of protection	IP 65
Protection class	I
Filament test	960°C - 30 seconds
Impact resistance	IK07
Ambient temperature	-20 °C ... + 40 °C
Conformity mark	CE