


FLAT POLYMERO

312092.002.2 | Ceiling and wall luminaires



Ceiling and wall luminaires
4051859155881
D 515, H 150

Ceiling mounting, Wall (surface)
white

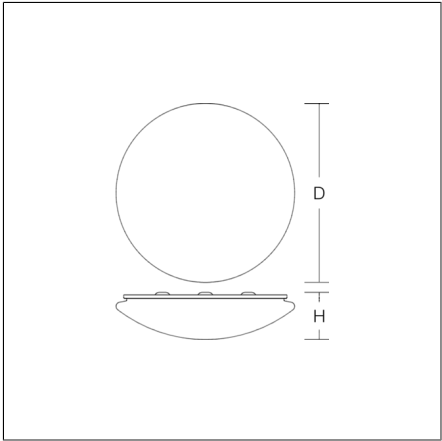

Decorative round surface-mounted luminaire. Base: metal, powder-coated. Diffuser made of plastic (polycarbonate), opal, shockproof. Diffuser fastening: patented push system. Suitable for Ceiling mounting, Wall (surface).

Product specifications

Diameter D	515 mm
Height H	150 mm
Weight	2.82 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	3250 lm
System power	29 W
System efficiency	112 lm/W
Glare evaluation UGR (4H 8H)	20,1
Beam angle	down 120° up 180°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	83
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	Phase cut-off/cut-on
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	53
Luminaires on B16A fuse	85
Luminaires on C10A fuse	53
Luminaires on C16A fuse	85
Inrush current / Inrush current duration	0.2 A / 10000 µs
CIE Flux Code / CEN Flux Code	41 70 88 88 100
Type of protection	IP 40
Protection class	I
Filament test	850°C - 30 seconds
Impact resistance	IK10
Ambient temperature	25 °C
Conformity mark	CE, EAC

Accessories



981806.002
Decorative ring, white



981806.004
Decorative ring, silver


FLAT POLYMERO

312092.002.2 | Ceiling and wall luminaires



981806.0042
Decorative ring, nickel

Spareparts



08-311170.032
Replacement diffuser