



# CorePro Plastic LEDcandles & lusters

## CorePro lustre ND 7-60W E14 865 P48 FR

The CorePro LEDcandles and lusters are designed for retrofit replacement of incandescent lamps and are particularly attractive for chandeliers. They are compatible with fixtures with an E14 holder for candles and E14 or E27 holders for lusters and are available in multiple color temperatures. LED lamps deliver huge energy savings of up to 80% energy-saving compared with halogen lamps and provide excellent quality of light. By offering a lifetime of 15,000 hours it lowers maintenance costs. The CorePro LED candles and lusters are perfect for your basic lighting needs.

### Product data

General Information		Photobiological safety according to EN 62471	
Cap-Base	E14	RG1	
Nominal lifetime	15,000 hour(s)	<b>Operating and Electrical</b>	
Switching Cycle	50,000	Line Frequency	50 to 60 Hz
Lighting Technology	LED	Input Frequency	50 to 60 Hz
Flux measurement reference	Sphere	Power Consumption	7 W
<b>Light Technical</b>		Lamp Current (Nom)	59 mA
Color Code	865 [CCT of 6500K]	Wattage Equivalent	60 W
Luminous Flux	806 lm	Starting Time (Nom)	0.5 s
Color Designation	Cool Daylight	Warm-up time to 60% light	0.5 s
Correlated Color Temperature (Nom)	6500 K	Power Factor (Fraction)	0.51
Luminous Efficacy (rated) (Nom)	115.00 lm/W	Voltage (Nom)	220-240 V
Color Consistency	<6	<b>Temperature</b>	
Color rendering index (CRI)	80	T-Case Maximum (Nom)	87 °C
LLMF At End Of Nominal Lifetime (Nom)	70 %		

# CorePro Plastic LEDcandles & lusters

## Controls and Dimming

Dimmable	No
----------	----

## Mechanical and Housing

Bulb Finish	Frosted
Bulb Shape	P48
Net Weight (Piece)	0.023 kg

## Approval and Application

Energy Efficiency Class	E
Energy Consumption kWh/1000 h	7 kWh
EPREL Registration Number	453217
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.4


## Application Conditions

can it be used in closed luminaires	No
-------------------------------------	----

## Product Data



Order product name	CorePro lustre ND 7-60W E14 865 P48 FR
Full product name	CorePro lustre ND 7-60W E14 865 P48 FR
Full product code	871951431310100
Order code	929002973502
Material Nr. (12NC)	929002973502
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514313101
Numerator - Packs per outer box	10
EAN/UPC - Case	8719514313118

## Dimensional drawing

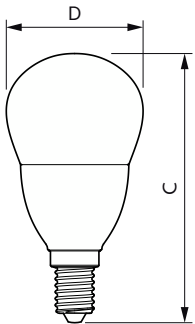

Product	D	C
CorePro lustre ND 7-60W E14 865 P48 FR	35 mm	106 mm

## Photometric data

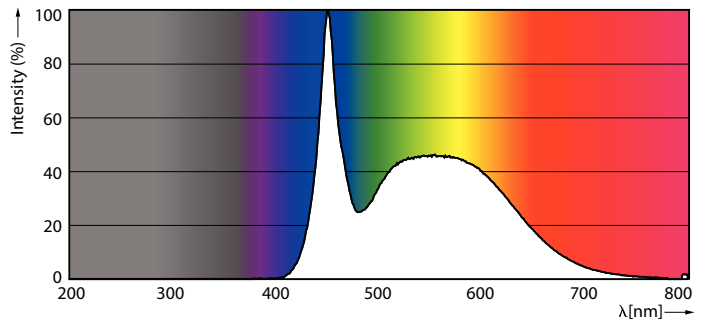


General uniform lighting - CorePro lustre ND 7-60W E14 865 P48 FR

Spectral Power Distribution Colour - CorePro lustre ND 7-60W E14 865 P48 FR

# CorePro Plastic LEDcandles & lusters

## Photometric data




Light Distribution Diagram - CorePro lustre ND 7-60W E14 865 P48 FR

## Lifetime



Life Expectancy Diagram

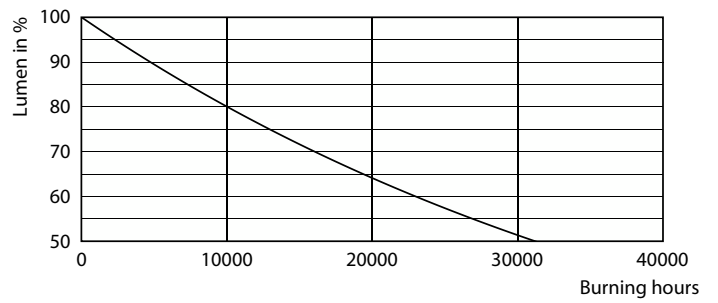

Lumen Maintenance Diagram - CorePro lustre ND 7-60W E14 865 P48 FR

