


FLAT POLYMERO

672388.002.1 | Combined luminaires for escape route illumination



Ceiling and wall luminaires
4051859394860
D 515, H 150

Ceiling mounting, Wall (surface)
white

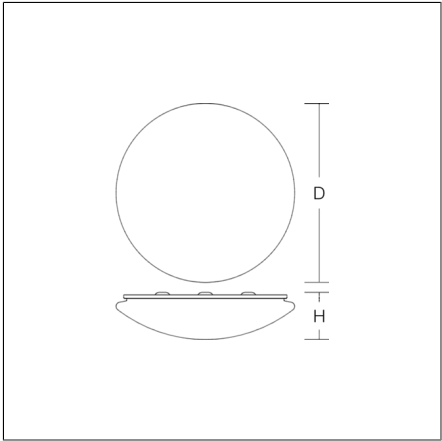

Decorative round surface-mounted luminaire. For escape route illumination. Base: metal, powder-coated. Diffuser made of non-yellowing plastic (PMMA), opal. Diffuser fastening: patented push system. Suitable for Ceiling mounting, Wall (surface). Driver integrated.

Product specifications


| | |
|---|--------------------------------|
| Typ of emergency lighting | Central battery system |
| Monitoring | Power circuit |
| Battery | without |
| Operating mode | Combined NL readiness |
| Diameter D | 515 mm |
| Height H | 150 mm |
| Weight | 2.56 kg |
| Light source | LED |
| Colour temperature | 4000 K |
| Rated luminous flux, mains operation | 2600 lm |
| System power, mains operation | 23 W |
| Rated luminous flux, emergency operation | 530 lm |
| System power, emergency operation | 5,8 W |
| System efficiency | 113 lm/W |
| Glare evaluation UGR (4H 8H) | 19 |
| Beam angle | down 117° up 180° |
| Colour rendering index (CRI) | 80 |
| Colour tolerance | 4 |
| Photobiological safety according to EN 62471 | Risk group 0 |
| Driver | Converter |
| Control | on/off |
| Voltage | 220 - 240 V / 0 Hz, 50 - 60 Hz |
| Luminaires on B10A fuse | 7 |
| Luminaires on B16A fuse | 12 |
| Luminaires on C10A fuse | 13 |
| Luminaires on C16A fuse | 21 |
| Inrush current / Inrush current duration | 37 A / 250 µs |
| CIE Flux Code / CEN Flux Code | 42 71 89 88 100 |
| Type of protection | IP 40 |
| Protection class | I |
| Filament test | 650°C - 30 seconds |
| Impact resistance | IK03 |
| Ambient temperature for maintained power | -10 °C ... + 35 °C |
| Ambient temperature for non-maintained power mode | -10 °C ... + 35 °C |
| Conformity mark | CE, EAC |

FLAT POLYMERO

672388.002.1 | Combined luminaires for escape route illumination



Spareparts



08-311170.012
Replacement diffuser