

# Axyl Opera

THORN

## 96700777 AXYL OPERA M WO 1L 930 WB HF ANT

LED 3W AXYL_OP_M_WB930	IP67	IK09	⊕	CE
------------------------	------	------	---	----


### Axyl Opera

AXYL Opera, a floor recessed, architectural LED luminaire for decorative facade lighting, with wide beam distribution. Class I electrical.. Fixed output LED driver. , IP67, Impact strength: IK09. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: - 20°C to +40°C. Complete with 3000K LED..


Dimensions: 135 x 135 x 135 mm  
Luminaire input power: 3 W  
Luminaire luminous flux: 35 lm  
Luminaire efficacy: 12 lm/W  
Weight: 1.48 kg



TLG\_AXYL\_F\_OPERA\_M\_WO\_WB\_ANT.jpg

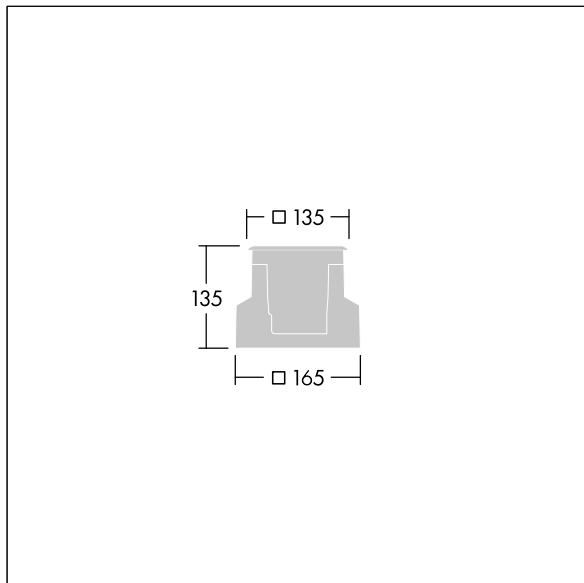

TLG\_AXYL\_M\_OPERA\_M.wmf

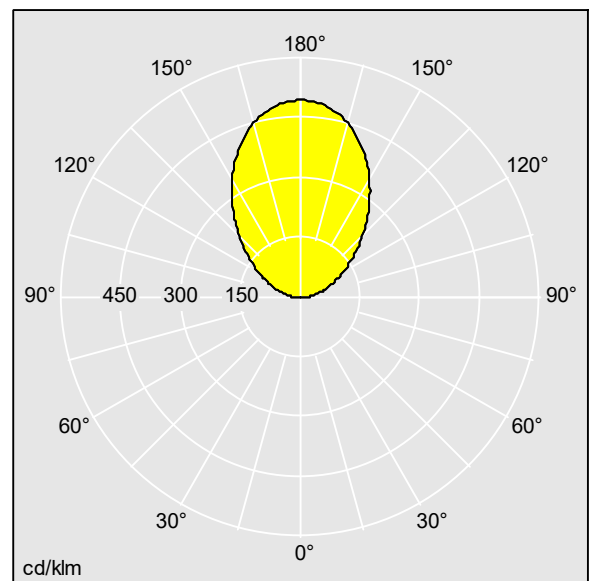

96700777.ltd

Lamp position: STD - standard  
Light Source: LED  
Luminaire luminous flux\*: 35 lm  
Luminaire efficacy\*: 12 lm/W  
Colour Rendering Index min.: 90  
Correlated colour temperature\*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3  
Rated useful life (B10)\*:  
L80 70000 h at 25 °C  
Ballast: 1x LED\_DRV  
Luminaire input power\*: 3 W Power factor = 0.47  
Dimming: FIX  
LOR: 1,00 ULOR: 1,00 DLOR: 0,00

This product contains a light source of energy efficiency class E.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting