



DEECOS S micro

742155.002.1.76 | Surface mounted projector

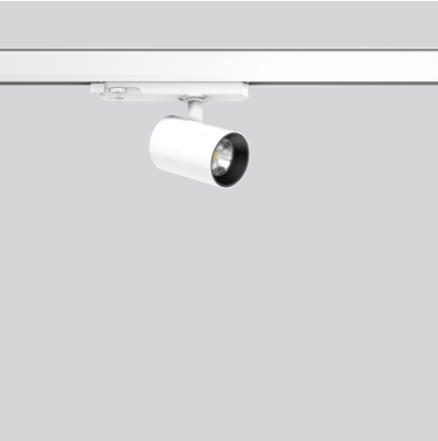

Surface mounted projectors
4051859738862
D 60, H 110

Track on ceiling, Wall track
traffic white, matt (RAL 9016)

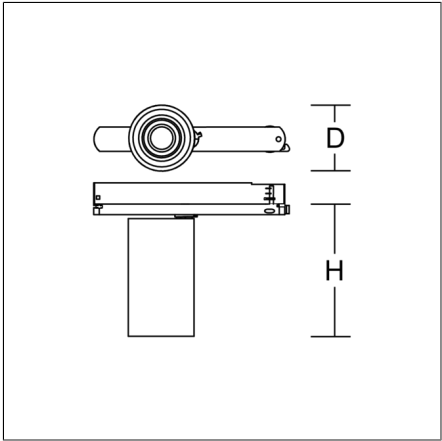


LED surface-mounted projector in modern design with no visible cooling ribs. Housing: die-cast aluminium, powder-coated. Rotation range: 356°. Swivel range: 90°. Black plastic ring and recessed LED to prevent glare from the side. Optical assembly with lens made of plastic (polycarbonate) for the best homogeneous light distribution - can be changed without tools. Best colour rendering index Ra>90. With adapter for RZB 3-circuit DALI tracks. Suitable for Track on ceiling, Wall track. Track-in driver integrated into the adapter. High quality converter without flickering and stroboscopic effect. The following accessories can be mounted without use of tools: interchangeable lenses, decorative glasses, honeycomb louvre, clear and frosted diffusers, white interchangeable plastic ring.

Product specifications

| | |
|--|--------------------------|
| Diameter D | 60 mm |
| Height H | 110 mm |
| Weight | 330 g |
| Light source | LED |
| Colour temperature | 3000 K |
| Rated luminous flux | 1400 lm |
| System power | 16 W |
| System efficiency | 88 lm/W |
| Glare evaluation UGR (4H 8H) | 18,3 |
| Beam angle | 35° |
| Rated life | 50000 h (L90/B10) |
| Colour rendering index (CRI) | 92 |
| Colour tolerance | 2 |
| Photobiological safety according to EN 62471 | Risk group 1 |
| Driver | Converter, dimmable |
| Control | DALI |
| Voltage | 220 - 240 V / 50 - 60 Hz |
| Luminaires on B16A fuse | 27 |
| Luminaires on C16A fuse | 44 |
| Inrush current / Inrush current duration | 18 A / 2 µs |
| CIE Flux Code / CEN Flux Code | 96 100 100 100 100 |
| Type of protection | IP 20 |
| Protection class | II |
| Filament test | 650°C - 30 seconds |
| Impact resistance | IK06 |
| Ambient temperature | 25 °C |
| Conformity mark | CE |

Accessories




982801.003
Anti-glare honeycomb louvre



982802.000
Diffuser, transparent

DEECOS S micro

742155.002.1.76 | Surface mounted projector



982802.010
Diffuser, satinated



982803.013
Reflector flood



982804.023
Wide flood lens




982806.002
White plastic ring for reflector.



982803.003
Reflector spot



982804.013
Medium lens



982805.003
Oval corridor lens



982807.002
White plastic ring for lens.