




Pendant luminaires
4051859985921
L 485, B 125, H 250

Suspension cable/chain
traffic white, matt (RAL 9016)

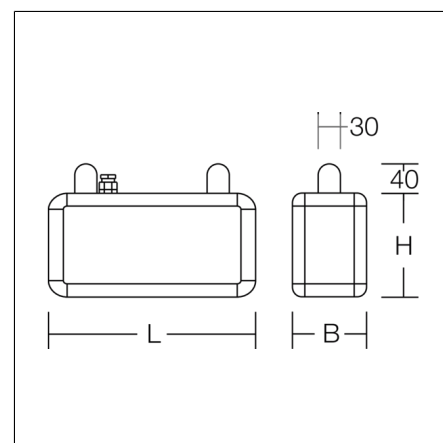

Rectangular pendant luminaire in classic design. For escape route identification. Housing: aluminium, with plastic corner connectors. Display panels: plastic, opal, with motifs on one side/on both sides. Pendant luminaires (suspension provided on site) ready for connection to two suspension cables or chains. Driver integrated. Suitable for connection to central battery systems. With AC Control monitoring module for LUXIFAIR central battery units. Please indicate legend number when placing your order!

Product specifications

Typ of emergency lighting	Central battery system
Monitoring	Luxifair AC-Control
Battery	without
Operating mode	maintained power mode
Viewing Distance	43 m
Length L	485 mm
Width B	125 mm
Height H	250 mm
Weight	2.78 kg
Light source	LED
Colour temperature	4000 K
System power, mains operation	7,3 W
System power, emergency operation	7,3 W
Colour rendering index (CRI)	70
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 Hz
Luminaires on B10A fuse	72
Luminaires on B16A fuse	115
Luminaires on C10A fuse	90
Luminaires on C16A fuse	144
Inrush current / Inrush current duration	5 A / 100 µs
CIE Flux Code / CEN Flux Code	22 49 75 58 100
Type of protection	IP 44
Protection class	I
Filament test	650 °C
Impact resistance	IK03
Ambient temperature for maintained power	-10 °C ... + 40 °C
Ambient temperature for non-maintained power mode	-10 °C ... + 40 °C
Conformity mark	CE, EAC