


CENTRYXX W IP65plus

672547.009.89 | Stand-by luminaires for escape route illumination



Wall luminaires
4051859869115
L 117, B 190, H 190

Wall (surface)
graphite grey (RAL 7024)

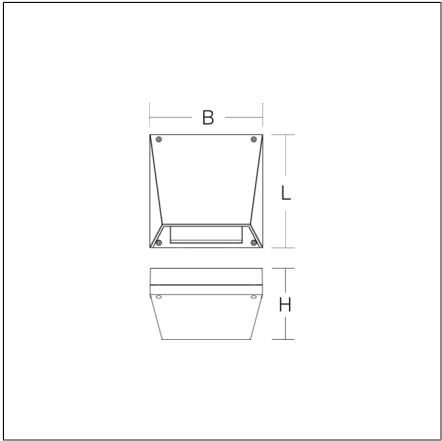

Wall luminaire for escape route illumination. Housing: die-cast aluminium, powder-coated. With plastic lenses for area lighting. Driver integrated. Suitable for connection to central battery systems. With AC Control monitoring module for LUXIFAIR central battery units.

Product specifications

Type of emergency lighting	Central battery system
Monitoring	Luxifair AC-Control
Battery	without
Operating mode	maintained power mode
Length L	117 mm
Width B	190 mm
Height H	190 mm
Weight	1.9 kg
Light source	LED
Colour temperature	6500 K
Rated luminous flux, mains operation	380 lm
System power, mains operation	5,9 W
Rated luminous flux, emergency operation	390 lm
System power, emergency operation	5,4 W
System efficiency	64 lm/W
Glare evaluation UGR (4H 8H)	40,6
Beam angle	90°/60°/29°/60°
Colour rendering index (CRI)	70
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 Hz, 60 Hz
Luminaires on B10A fuse	18
Luminaires on B16A fuse	29
Luminaires on C10A fuse	36
Luminaires on C16A fuse	58
Inrush current / Inrush current duration	3.3 A / 400 µs
CIE Flux Code / CEN Flux Code	39 66 86 96 100
Type of protection	IP 65
Protection class	I
Filament test	960°C - 30 seconds
Impact resistance	IK07
Ambient temperature for maintained power	-10 °C ... + 40 °C
Ambient temperature for non-maintained power mode	-10 °C ... + 40 °C
Conformity mark	CE